

04/01/99
jc548 U.S. PTO

(Rel.78-12/98 Pub.605)

FORM 17-1

17-PTO

A/re

jc525 U.S. PTO
09/286679
04/01/99

Practitioner's Docket No. VN418RI

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Date: April 1, 1999

Assistant Commissioner for Patents
Washington, D.C. 20231

REISSUE APPLICATION TRANSMITTAL

Transmitted herewith is the application for reissue of U.S.

☒ Utility Patent ☐ Plant Patent ☐ Design Patent
No. 5,617,418 issued on April 1, 1997

Inventor(s): Ramin Shirani, Brian C. Edem

Title: Network Link Detection and Generation

Enclosed are the following:

1. Specification, claim(s) and drawing(s) (37 C.F.R. § 1.173)

- (a) ☐ 20 page(s) of specification
☐ 8 page(s) of claims
☐ 1 page(s) of abstract

NOTE: This must include the entire specification and claims of the patent, with the matter to be omitted by reissue enclosed in square brackets. Any additions made by the reissue must be underlined, so that the old and new specifications and claims may be readily compared. Claims should not be renumbered. The numbering of claims added by reissue should follow the number of the highest numbered patent claim. No new matter shall be introduced into the specification. (37 C.F.R. § 1.173).

CERTIFICATION UNDER 37 C.F.R. § 1.10*

(Express Mail label number is mandatory.)

(Express Mail certification is optional.)

I hereby certify that this Reissue Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date April 1, 1999 in an envelope as "Express Mail Post Office to Addressee," mailing Label Number EL278274498US addressed to the: Assistant Commissioner for Patents, Washington, D.C. 20231.

Jennifer S. Fryhling
(type or print name of person mailing paper)

[Signature]
Signature of person mailing paper

WARNING: Certificate of mailing (first class) or facsimile transmission procedures of 37 C.F.R. § 1.8 cannot be used to obtain a date of mailing or transmission for this correspondence.

WARNING: Each paper or fee filed by "Express Mail" must have the number of the "Express Mail" mailing label placed thereon prior to mailing. 37 C.F.R. § 1.10(b).

"Since the filing of correspondence under § 1.10 without the Express Mail mailing label thereon is an oversight that can be avoided by the exercise of reasonable care, requests for waiver of this requirement will not be granted on petition." Notice of Oct. 24, 1996, 60 Fed. Reg. 56,439, at 56,442.

- (b) ☒ 15 sheet(s) of drawing (drawings amended)
- ☒ Formal
- ☐ Informal

NOTE: "Amendments which can be made in a reissue drawing, that is, changes from the drawing of the patent, are restricted." 37 C.F.R. § 1.174(b).

- ☒ No changes in the drawings, upon which the original patent was issued, are to be made. Therefore, in accordance with 37 C.F.R. § 1.174(a), please find attached, in the size required for original drawings:
- ☐ a copy of the printed drawings of the patent.
- ☐ a photoprint of the original drawings.
- ☒ A letter requesting transfer of the drawings from the original patent file to this reissue application is attached.

2. Declaration and power of attorney

- ☐ _____ pages of declaration and power of attorney

3. Preliminary amendment

(check, if applicable)

- ☐ Attached

4. Offer to surrender the original letters patent in accordance with 37 C.F.R. § 1.178 is attached.

- ☐ Offer to surrender is by the inventor
- ☐ along with assent of assignee.
- ☐ Offer to surrender is by the assignee of the entire interest (and the reissue application does not seek to enlarge the claims of the original patent).

5. Letters patent

- ☐ Original letters patent are attached.
- ☐ Declaration that original letters patent lost or inaccessible is attached.
- ☒ A copy of the original printed patent is attached.

NOTE: "The application may be accepted for examination in the absence of the original patent or the declaration but one or the other must be supplied before the case is allowed." 37 C.F.R. § 1.178.

NOTE: "Where the original patent grant is not submitted with the reissue application as filed, patentee should include a copy of the printed original patent. Presence of a copy of the original patent is useful for the calculation of the reissue filing fee and for the verification of other identifying data." M.P.E.P., 6th ed., rev. 2, § 1416.

NOTE: "If a reissue be refused, the original patent will be returned to applicant upon his request." 37 C.F.R. § 1.178.

6. Petition to proceed without assignee's assent

☐ Attached hereto is a "PETITION TO PROCEED WITH REISSUE APPLICATION WITHOUT ASSIGNEE'S ASSENT".

A. ☐ The fee payment is authorized in the attached:

☐ "REISSUE APPLICATION TRANSMITTAL" Form

☐ "COMPLETION OF FILING REQUIREMENTS — REISSUE APPLICATION" Form.

B. ☐ Payment is authorized below.

7. Information Disclosure Statement

☐ Attached

☐ Copies of the IDS citation(s) is/are attached.

8. Priority—35 U.S.C. § 119

☐ Priority of application Application No. 0 / _____, filed on _____, in _____ is claimed under 35 U.S.C. § 119.
Country

☐ The certified copy has been filed in prior application Application No. 0 / _____ filed on _____

9. Basic Filing Fee Calculation (37 C.F.R. § 1.16(h), (i) and (j))

CLAIMS AS FILED			
Number Filed	Number Extra	Rate	Basic Fee (37 C.F.R. 1.16(h)) \$760.00
Total Claims (37 C.F.R. § 1.16(j))	— 20 (and also in excess of total claims in patent)		
39	19	X \$18.00	342.00
Independent Claims 37 C.F.R. § 1.16(i)	— (number of inde- pendent claims in patent)		
5	5	X \$78.00	390.00
Filing fee Calculation			\$ 1492.00

NOTE: Multiple dependent claims are treated as ordinary claims for fee purposes. 37 C.F.R. § 1.16(j).

(Reissue Application Transmittal [17-1]—page 3 of 6)

10. Small Entity Status (if applicable)

NOTE: A new statement is required for the reissue, even if one has been filed in the original patent. 37 C.F.R. § 1.27(a).

WARNING: "Small entity status must not be established when the person or persons signing the . . . statement can **unequivocally** make the required self-certification." M.P.E.P. § 509.03, 6th ed., rev. 2, July 1996 (emphasis added).

- ☐ A statement that this filing is by a small entity is
☐ attached.

Filing Fee Calculation (50% of above) \$ _____

NOTE: If a statement is filed within 2 months of the date of timely payment of a fee, then the excess fee paid will be refunded on request. 37 C.F.R. § 1.28(a). Effective April 1, 1984.

11. Additional Fee Payments

- ☐ Payment is being made for "PETITION TO PROCEED WITH REISSUE APPLICATION WITHOUT ASSIGNEE"
(37 C.F.R. § 1.17(h)) \$130.00

12. Total Fees Due

Filing Fee	\$ <u>1492.00</u>
Petition fee	\$ _____
Total Fees Due	\$ <u>1492.00</u>

13. Method Of Payment of Fees

- ☐ Enclosed is a check in the amount of \$ _____
- ☒ Charge Account No. 50-0251 in the amount of \$ 1492.00
A duplicate of this request is attached.

NOTE: Fees should be itemized in such a manner that it is clear for which purpose the fees are paid. 37 C.F.R. § 1.22(b).

14. Authorization To Charge Additional Fees

WARNING: If no fees are to be paid on filing, the following items should not be completed.

WARNING: Accurately count claims, especially multiple dependent claims, to avoid unexpected high charges, if extra claim charges are authorized.

- ☒ The Commissioner is hereby authorized to charge the following additional fees by this paper and during the entire pendency of this application to Account No. 50-0251 :

☒ 37 C.F.R. § 1.16(a), (f) or (g) (filing fees)

☒ 37 C.F.R. § 1.16(b), (c) and (d) (presentation of extra claims)

NOTE: Because additional fees for excess or multiple dependent claims not paid on filing or on later presentation must only be paid or these claims cancelled by amendment prior to the expiration of the time period set for response by the PTO in any notice of fee deficiency (37 C.F.R. § 1.16(d)), it might be best not to authorize the PTO to charge additional claim fees, except possibly when dealing with amendments after final action.

☒ 37 C.F.R. § 1.16(e) (surcharge for filing the basic filing fee and/or declaration on a date later than the filing date of the application)

☒ 37 C.F.R. § 1.17(a)(1)-(5) (extension fees pursuant to § 1.136(a)).

☒ 37 C.F.R. § 1.17 (application processing fees)

NOTE: "A written request may be submitted in an application that is an authorization to treat any concurrent or future reply, requiring a petition for an extension of time under this paragraph for its timely submission, as incorporating a petition for extension of time for the appropriate length of time. An authorization to charge all required fees, fees under § 1.17, or all required extension of time fees will be treated as a constructive petition for an extension of time in any concurrent or future reply requiring a petition for an extension of time under this paragraph for its timely submission. Submission of the fee set forth in § 1.17(a) will also be treated as a constructive petition for an extension of time in any concurrent reply requiring a petition for an extension of time under this paragraph for its timely submission." 37 C.F.R. § 1.136(a)(3).

NOTE: "Amounts of twenty-five dollars or less will not be returned unless specifically requested within a reasonable time, nor will the payer be notified of such amounts; amounts over twenty-five dollars may be returned by check or, if requested, by credit to a deposit account." 37 C.F.R. § 1.26(a).

☐ 37 C.F.R. § 1.18 (issue fee at or before mailing of Notice of Allowance, pursuant to 37 C.F.R. § 1.311(b))

NOTE: Where an authorization to charge the issue fee to a deposit account has been filed before the mailing of a Notice of Allowance, the issue fee will be automatically charged to the deposit account at the time of mailing the notice of allowance. 37 C.F.R. § 1.311(b).

NOTE: See 37 C.F.R. § 1.28.

15. ☐ Additional Enclosures

Reg. No.: 32,788

Tel. No.: (408) 342-1866

Customer No.:



SIGNATURE OF PRACTITIONER

Alan R. Loudermilk
(type or print name of practitioner)

10950 N. Blaney Ave., Ste. B
P.O. Address

Cupertino, CA 95014

In Re Reissue Application of: Shirani, et al.)
Application No.:)
Filed: April 1, 1999)
For: NETWORK LINK DETECTION)
AND GENERATION)

REQUEST FOR ABSTRACT OF TITLE

Please prepare a Certified Abstract of Title, in respect of U.S. Patent No. 5,617,418 for placing in the official file of the Reissue Application that is filed herewith. Title in the name of National Semiconductor Corporation was recorded Reel 6902, Frame 090.

Respectfully submitted,

Alan Lautermit

Alan R. Loudermilk
Registration No. 32,788
Attorney for Applicant(s)

April 1, 1999
10950 North Blaney Ave., Suite B
Cupertino, CA 95014
408-342-1866

NETWORK LINK DETECTION AND GENERATION

This application is a continuation-in-part of U.S. Ser. No. 07/971,018, filed Nov. 2, 1992, abandoned for "Network Link Endpoint Capability Detection," incorporated herein by reference. 5

The present invention is directed to a method and apparatus for generating and detecting, in a network, such as a local area network, the link signals transmitted to or received from one or more endpoints of a data communication link, and in particular to a method and apparatus for generating one or a plurality of different link signals and determining whether a data source/sink at the end of a datalink has the capability of first data communication protocol or a second data communication protocol. 10 15

BACKGROUND OF THE INVENTION

A typical data communication network is configured to operate according to a single predetermined protocol, e.g., an Ethernet protocol, a token ring protocol, other LAN protocols, or an isochronous protocol. An example of an Ethernet system is an implementation known as 10 Base T which is described in the draft Nine supplement to IEEE standard 802.3, dated Nov. 15, 1989. Other examples of data communication protocols are X.25, and the Token Ring System, described for example, by IEEE Standard 802.5. Both Ethernet and token ring systems convey data in packets but each uses a different media access method. 20 25 30

As shown in FIG. 1A, in a packet system, data is transferred in a plurality of packets **12a**, **12b** which can be either constant-sized or variable-sized. Each packet includes a field of data **14a**, **14b** which may be preamble information **16a**, **16b** housekeeping information such as data source information, data destination information, and the like **18a**, **18b** and a frame end marker **20a**. As seen in FIG. 1A, because the fields provided for data **14a**, **14b** are not substantially continuous, the packetized scheme of FIG. 1A is not isochronous but "bursty" in nature. 35 40

In a token ring system, a node is permitted to transmit data only after receipt of an electronic "token." As depicted in FIG. 1B, a first station may transmit a token **22** which is received **24a** by second station whereupon the second station may begin transmission of data **26a**. After a period of data transmission, the second station transmits the token **22b** which is received by a third station **24b** that can then begin its own transmission of data **26b**. As seen in FIG. 1B, because data transmission is synchronized with the occurrence of an event (the arrival of a token), the token ring system is not an isochronous data transfer system. 45 50

FIG. 1C schematically depicts isochronous data transfer. In general terms, isochronous data is data which is non-packetized and of indeterminate, potentially continuous duration. In isochronous data transfer, the data transfer is initiated, such as by initiating a telephone conversation or beginning a video camera transmission **30**. After the data transfer or connection is initiated, transmission of the data, possibly accompanied by transmission of housekeeping information (such as destinations, audio or video trimming, and the like) is provided substantially continuously for an indeterminate period such as until termination of the connection **32**. Although it may be that not every bit transferred represents a data bit (since "housekeeping" bits may also be transferred), the transfer of data is substantially continuous in the sense that there are no substantial periods during 55 60 65

which no data bits are transferred. It is possible that the data being transferred is "Null" data such as silence during a telephone conversation or transfer of a blank video image. One type of isochronous data transfer protocol is the Fiber Distributed Data Interface-II (FDDI-II) as described, for example, in *FDDI-II Hybrid Multiplexer*, Revision 2.4, dated Mar. 25, 1991.

Previous systems which were configured to use only a single-type protocol had the disadvantage that it was not possible to operate a mixed-protocol or "mixed-environment" system. Also when upgrading a network system, it was necessary to upgrade the entire system and it was infeasible or wasteful to upgrade only part of the system (such as only some of the nodes or such as upgrading nodes without upgrading hubs or upgrading hubs without upgrading nodes). Additionally, when a system or system components were installed, or repaired it was necessary for the installing personnel to be familiar with the particular single protocol for which the network was configured and to make such installation, upgrade, or repair in accordance with such a single protocol. Furthermore, it was necessary that apparatus connected to the system be configured for exclusive operation in accordance with the predetermined single protocol.

SUMMARY OF THE INVENTION

The present invention includes a recognition of the problems found in previous devices. According to an embodiment of the present invention an apparatus connected to one endpoint of a network link is able to detect which type of link signal, out of a number of possibilities is being received, thus indicating the protocol capability of the apparatus connected to the other end of the network link. In one embodiment, the apparatus is able to generate one of a plurality of link signals for transmission to the far end of the link, depending on the capabilities of each end of the link. Preferably, a first end of the network link has a capability of providing data communication under at least two different protocols and can select the appropriate protocol depending on what type of protocol capability is detected in the apparatus at the other end of the link.

Link endpoint capability detection takes advantage of the fact that different data communication protocols provide signals on the physical medium which have different characteristics. The various protocols can typically be detected by their unique timing and data patterns. According to one aspect of the invention, the network has a star topology with at least one hub and a plurality of nodes each node being connected to a hub by physical media constituting the link. The capability detection of the present invention can be performed by apparatus at either end of a link, and in particular, in a star topology network can be conducted by the hub or by any node. In one embodiment, capability detection is initiated by the hub. In a non-star topology at least one node can operate under two or more protocols and can detect the capability of another node with which it is connected.

Although, for convenience, much of the following description is in terms of hubs and nodes, aspects of the present invention can be implemented in topologies other than hub-and-node topologies (e.g., ring topologies, and tree topologies) as will be apparent to those of skill in the art. Descriptions of hub circuitry in the following can be implemented, e.g., on a PBX adapter card for a personal computer.

The apparatus which initiates capability detection, according to one embodiment, transmits a signal onto the

physical medium. In one embodiment, the apparatus at the far end of the link outputs, onto the physical medium, a second signal. Preferably, a second signal will be output from the apparatus at the far end of the link, regardless or whether the apparatus at the far end operates according to a first protocol or a second protocol. However, the second signal which is placed onto the physical medium at the far end of the link has either a first form or a second form, depending on whether the apparatus at the far end has a first protocol capability or a second protocol capability. This difference in signal is detected at the first end of the link and this could be used as a basis for determining the protocol capability at the far end of the link.

In another embodiment, the first apparatus outputs a first signal. The second apparatus outputs a response only if it has a first protocol capability. If no response is output, the first apparatus outputs a second signal in an attempt to elicit a response according to a second protocol. This process can be repeated until the first apparatus outputs a signal to which the second apparatus responds, thereby indicating a protocol capability of the second apparatus.

According to one embodiment, the first signal which is output, also carries information regarding the protocol capability of the first endpoint. That is, preferably, the first signal has a first form if the first endpoint has a first protocol capability and it has a second form if the first endpoint has a second protocol capability. Preferably, the apparatus at the far end of the link will respond to either of these forms in the manner described above.

In the preferred embodiment, the apparatus which has detected the capability at the far endpoint adjusts its operation to accommodate that capability. For example, when the first endpoint detects that the far endpoint has a first protocol capability, the first endpoint will configure itself to conduct subsequent communication using the first protocol. However, if the first endpoint detects that the far endpoint has a second protocol capability, the first endpoint is able to configure itself to accommodate the second protocol capability.

In one embodiment the far endpoint will have only a single protocol capability. However, it is possible to configure a network in which both link endpoints have multiple protocol capabilities and both can detect one or more capabilities at the opposite endpoint. The endpoints can then configure themselves to operate at the best or most desired protocol level.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1A, 1B and 1C of the timing of a packet transmission system, a token ring transmission system, and an isochronous transmission system respectively;

FIG. 2 is a schematic block diagram showing three nodes connecting to a hub;

FIG. 3 is a schematic block diagram showing a number of hubs connected together using a ring structure;

FIG. 4 is a schematic block diagram of circuitry for multiplexing and preparing data for transmission over to media and for receiving information from the media and demultiplexing the data;

FIG. 5 is a schematic block diagram of hub receiver circuitry according to an embodiment of the present invention;

FIG. 6 schematic block diagram of a hub transmitter-circuitry;

FIG. 7 is a timing diagram showing the relative timing of transmissions and receptions at the hub and nodes;

FIGS. 8A–8E are block diagrams depicting link endpoint capability detection for five different network configurations according to embodiments of the present invention;

FIG. 9 is a block diagram of a node receiver, according to an embodiment of the present invention;

FIGS. 10A, 10B and 10C depict timing of 10 Base T link pulses, isolink pulse stream and isosleep link pulses, respectively;

FIG. 11 depicts a state machine for generating various types of link pulses;

FIG. 12 depicts a state machine for detection of 10 Base T links;

FIG. 13 depicts a state machine for detection of isochronous or isochronous-ethernet pulses or fast link pulses;

FIG. 14 depicts pulses for defining acceptance windows; and

FIG. 15A–15D are block diagrams depicting circuitry components that can be used to implement state machines according to one embodiment of the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Before describing link endpoint capability detection, a general description of one type of network will be provided as one example of a data communication system in which the present invention can operate. A data communication system can be configured in a star-topology with a plurality of nodes of 42a, 42b, 42c, (FIG. 2) each coupled to a hub 44a by data links comprising physical data transmission media such as one-way twisted pair wires 46a–46f. The number of nodes can be adjusted depending on the data transmission needs and objectives of the system. In one embodiment, each hub is configured to accommodate connection with up to 16 nodes. Each 42a, 42b, 42c includes circuitry 50a, 50b, 50c for receiving data, converting it to a form suitable for transmission onto the physical media 45a, 46c, 46e using transmitters 78a, 78b, 78c and receipt of signals from the physical media 46b, 46d, 46f using receivers 79a, 79b, 79c and conversion to a form suitable for use by the data sinks. Each of the nodes 42a, 42b, 42c includes data sources and sinks 48a–48g. The data sources and sinks can be isochronous sources and sinks such as video cameras 48a, 48d and monitors 48b, 48a, non-isochronous sources and sinks such as an Ethernet media access controller 48c, 48g, and signaling or D channel sources and sinks such as an emulated or virtual key pad 48f provided, for example, on a personal computer (PC) terminal.

Each of the nodes 42a, 42b, 42c can include various types of sources and sinks such as strictly isochronous sources and sinks, such as depicted for node one 42a, strictly non-isochronous sources/sinks as depicted for node three 42c or both isochronous and non-isochronous sources and sinks as depicted for node two 42b. The physical layer 52 of the network system depicted in FIG. 2 has portions which include the physical media 46a–46f and physical layer devices such as the node data receivers and converters 50a, 50b, 50c and the hub components 54a, 54b, 54c and 56. The physical layer can include devices for providing, e.g., transceivers for 10 Base T cables, data multiplexing, phase locked loop circuitry, FIFOs or other circuitry for cable length adjustment, smoothing, squelch and the like.

The hub 44a includes circuitry 54a, 54b, 54c for receiving data from the physical media 46a, 46c 46e separating the

isochronous-sourced data from the non-isochronous-sourced data and the D channel and M channel data and converting separated data into a form suitable for handling by downstream hub circuitry 56. In the depicted embodiment the separated isochronous-sourced data is provided to a time slot interchange controller 58 for placing the data on a high-bandwidth bus (e.g. the TSI bus) so that it can be transported to destination nodes or other TSI controllers in the hub or other hubs (as depicted, e.g. in FIG. 3) and/or retrieved by hub circuitry 54a, 54b, 54c for transmission to various destination nodes 42a, 42b, 42c, e.g. by a local loopback capability. The separated non-isochronous data is provided to circuitry 60 configured to convey the non-isochronous data to one or more of the hub circuitry 54a, 54b, 54c for, transmission to destination nodes 42a, 42b, 42c. In an embodiment in which non-isochronous-sourced data includes Ethernet data, the hub circuitry 60 can be a standard Ethernet repeater processor. In this way, the present invention can be at least partially backwards-compatible with previous Ethernet hub systems. The D channel and M channel information is provided to a signaling processor 62 which performs various maintenance and control functions such as identifying and alerting users of error conditions, and setting up requested calls or connections, i.e. source/destination paths e.g. by communicating with the isochronous and non-isochronous controllers 58, 60, e.g. over data path 64. The isochronous controller 58 can be, a data exchanger e.g., an isochronous switching device, such as that described in commonly-assigned application Ser. No 08/146,337 entitled "Time Slot Exchanger Switching Mechanism in a Network for Data Communication Having Isochronous Capability," filed on even date herewith and incorporated herein by reference. The non-isochronous controller 60 can be, e.g., an Ethernet repeater. As depicted in FIG. 3 a number of star-topology systems can be interconnected by connecting hubs 44a, 44b, 44c to one another, e.g. by a time slot interchange (TSI) ring.

According to the present invention, data communication can be provided according to one or more of a number of protocols. Those skilled in the art are familiar with protocols, but in general, a "protocol" includes a standard set of rules that specify the format, timing, sequencing and/or error checking for data transmission. Several network protocols are referenced above, including an Ethernet protocol such as 10 Base T, an isochronous protocol such as FDDI-II, and a token ring protocol. Another possible protocol is one in which both isochronous and non-isochronous data are combined into a frame structure for transmission across physical media. A frame-structure protocol of this type is described in greater detail in commonly-assigned application Ser. No. 07/969,916 titled "Network for Data Communication with Isochronous Capability" filed on Nov. 2, 1992 and incorporated herein by reference. According to one such protocol, the incoming data from the various sources is provided to a multiplexer 70 (FIG. 4) which performs time-division multiplexing on a four-bit basis. The pattern for the time division multiplexing is a repeating series of frames or templates. In this embodiment, the frames are repeated every 125 microseconds. The time division multiplexing is a multiplexing of isochronous-sourced data and non-isochronous-sourced data. The non-isochronous-sourced data can be data provided in accordance with a number of previously-available LAN systems and this protocol will be referred to, in general, as "isochronous-LAN" protocol. Several particular types of isochronous-LAN protocols are possible. When the isochronous data is multiplexed with LAN data which is provided according to an Ethernet protocol, such as a 10

5

10

20

45

55

65

face for detection of the mode or protocol in which the node is operating as described more fully below. The de-serializer/decoder **80** receives a reference clock signal **84**. The de-serializer/decoder includes circuitry which is functionally an inverse of the multiplexing/encoding circuitry described above. Referring to FIG. 4, the de-serializer/decoder includes phase lock decode circuitry **86**, the results of which are provided to NRZI decode circuitry **88** which, in turn, provides the decode results to four/five decode circuitry **90**, in turn providing results to a de-multiplexer **92** which separates the received data into the isochronous-sourced data **94a**, the non-isochronous-sourced data **94b** and signaling data, such as D channel and M channel data **94c**. The de-serializer/decoder **80** also outputs a synchronization signal, derived from the JK frame synchronization symbols **96** for use by a framing timing generator **98**.

Both the non-isochronous-sourced data **104** (FIG. 5) and the isochronous-sourced data **102** are made available to the various hub circuitry **56** or components **54a**, **54b**, **54c**, as needed for transmission back to destination nodes. In one embodiment, the separated isochronous data **102** and non-isochronous data **104** are reconfigured by the respective interfaces **58**, **60** to provide isochronous output **102** and non-isochronous output **104** in a form suitable for processing so as to provide the data as needed for transmission to the destination nodes via the physical layer. In one embodiment, the non-isochronous data **94b** can be configured by the physical layer E interface **59** (FIG. 5) so that the output data **104** can be processed by a repeater device **60** for eventual transmission to destination nodes. As an alternative to using a repeater for the non-isochronous data, packet connections may be linked through media access control layer bridges. Preferably, the output data **104** is in a form such that it can be handled by repeater circuitry of types previously available. For example, when the nonisochronous data **94b** within the physical layer is data which originated at the node **42b** from an Ethernet MAC, the output data **104** is in a form such that it can be handled by a standard Ethernet hub repeater **60** such as DP83950 "Repeater Interface Controller" (RIC) available from National Semiconductor Corporation, Santa Clara, Calif.

As shown in FIG. 5, the data received over the physical link **46** is also provided to an additional interface for handling data according to a second protocol, as described more thoroughly below. For example, when the second protocol is an Ethernet 10 Base T protocol, a 10 Base T interface **512** can be provided. The 10 Base T receive interface **512** can be a standard 10 Base T interface, such as Model DP83922 "Twisted Pair Transceiver Interface" (TPI) available from National Semiconductor Corporation, Santa Clara, Calif. A multiplexer **514** determines whether the repeater **60** receives a data stream from interface **59z** or the 10 Base T interface **512**. This selection by the multiplexer **514** is controlled by a mode select signal output over control line **516** from the link beat detect circuit **82** as described more fully below.

The data **198** output from the E transmit interface **168** is provided along with isochronous data output **164** and M channel D channel data **170** to encoder serializer circuitry **202**, depicted in FIG. 6. The encoder/serializer **202** is configured substantially like the encoding circuitry found in the node and depicted in FIG. 4. Specifically, the encoder/serializer **202** provides a multiplexer for combining the three streams of data **198**, **170**, **164**, a four/five encoder, an NRZI encoder, and pre-emphasis circuitry. The timing of transmission is controlled by transmit timing circuitry **204**. Output **206** from the encoder/serializer is selectively com-

bined with link beats from a link beat generator 208 by
 multiplexer 210 for purposes of link end point detection, as
 described below. The clock signal and the data 166 from the
 repeater 60, in addition to being provided to the E interface
 168 is also provided to a second interface which operates
 according to a second protocol. When a second protocol is
 an Ethernet 10 Base T protocol, the interface is an Ethernet
 10 Base T interface 520. The Ethernet 10 Base T interface
 transmit 520 can be of a type substantially identical to 10
 Base T interfaces provided in previous apparatus such as
 Model DP83922, "Twisted Pair Transceiver Interface (TPI)"
 available from National Semiconductor Corporation, Santa
 Clara, Calif. The output from the Ethernet 10 Base T
 interface 520 is provided to the multiplexer 210. Multiplexer
 210 is able to select, in response to a control signal 522,
 whether to output data originating from the repeater 60
 according to a first protocol determined by the E interface
 168, or according to a second protocol determined by the
 Ethernet 10 Base T interface 520, as described more fully
 below. The data sent from the hub 44a to the nodes 42 is sent
 in a frame format which is preferably substantially the same
 as the frame format used for the data sent from the nodes 42
 to the hub 44a as described above. At the nodes 42, the
 circuitry 50 includes devices (FIG. 4) for decoding and
 de-multiplexing data, similar to that described for perform-
 ing these functions in the hub, mainly a phase lock decode
 86, and NRZI decode 88, a four/five decode 90, and a
 de-multiplexer 92. Decoded and de-multiplexed data is then
 delivered to the various data sinks in the nodes 42.

As shown in FIG. 7, the timing of the system can be
 synchronized with a 125 microsecond reference clock signal
 214. In this example, the reference signal 214 provides an
 ascending clock edge every 125 microseconds. The refer-
 ence signal can be provided by any of a number of sources.
 Preferably, an embodiment of the present invention is con-
 figured to permit a reference signal 214 to be synchronized
 to an external clock reference, such as a reference signal
 from a wide area network or from a FDDI-II ring. The
 reference signal can be supplied through one of the nodes
 and transmitted to the hub for distribution to the other nodes,
 or can be supplied directly to the hub for distribution.

FIG. 8A depicts a network configuration in which the hub
 530a is a 10 Base T hub and the node 532a is a 10 Base T
 node, both of which are found in previously-available
 devices. In this system, the 10 Base T hub sends a signal,
 specifically a link test pulse, in accordance with IEEE
 Standard 802.3, over the physical medium to a 10 Base T
 node 532a. In a typical system, the 10 Base T hub outputs
 a signal upon being powered-up. The link test pulse used in
 previous devices is described in IEEE Standard 802.3.
 Briefly, a link test pulse can be described as a single 100
 nanosecond pulse occurring at a nominal 16 millisecond
 interval. The 10 Base T node 532a, typically in response to
 being powered-up, outputs onto the physical medium a
 second signal, which, in accordance with IEEE 802.3, is
 substantially identical to the above-described link test pulse.
 This link test pulse is received by the 10 Base T hub 530a.
 At this point, a 10 Base T hub proceeds to operate on the
 basis that it is connected to a 10 Base T node (532a) and the
 node 532a begins to operate on the basis that it is connected
 to a 10 Base T hub (530a) and normal 10 Base T commu-
 nication proceeds.

FIG. 8B depicts a configuration according to one inven-
 tion in which an Isochronous-Ethernet hub 530b is con-
 nected to a 10 Base T node 532a. The Isochronous-Ethernet
 hub outputs a probe signal 534. A probe signal differs from
 the link test pulse in that it has a faster link beat, for example

having a beat period of less than about 2 milliseconds. The 10 Base T node 532a is configured substantially identically to previously available 10 Base T nodes. Upon receipt of the probe pulse 534, it continues to output a link test pulse onto the physical medium. The isochronous-Ethernet hub 530b, upon receiving a link test pulse (rather than a probe pulse) can determine, on that basis, that the apparatus connected to the far end of the physical medium is a 10 Base T node 532a (rather than, for example, an isochronous-Ethernet node). Preferably, the isochronous-Ethernet hub 530b is capable of handling data either according to an isochronous-Ethernet protocol or a 10 Base T protocol. Upon receiving a link test pulse and determining that the node 532a is a 10 Base T node, the isochronous-Ethernet hub 530b will configure itself to conduct all future communications with node 532a using a 10 Base T protocol.

Although FIG. 8B shows only a single node 532a connected to the hub 530b, in a typical configuration, a plurality of nodes will be connected to each hub. Preferably, the hub 530b is capable of using different protocols with different nodes. Accordingly, an isochronous-Ethernet hub which is connected to both a 10 Base T node and an isochronous-Ethernet node can determine the capability of each node to which it is connected and can use the appropriate protocol for each node.

FIG. 8C depicts a network configuration in which a 10 Base T hub 530a is connected to an isochronous-Ethernet node 532b. Upon initialization of the system the 10 Base-T hub outputs a link test pulse 533. In the depicted embodiment the Isochronous-Ethernet node 532b can operate according to an Isochronous-Ethernet protocol. Therefore, upon receiving the link test pulse 533, it outputs a link test pulse 533. Accordingly, the 10 Base T hub 530a can only send Ethernet data and no isochronous data.

FIG. 8D depicts a network configuration in which an Isochronous-Ethernet hub 530c is connected to an isochronous node 532c. In the embodiment depicted in FIG. 8D, the node 532c only has isochronous protocol capability, but the hub 530c has both an isochronous-Ethernet protocol capability and an isochronous protocol capability. In this embodiment, upon initialization of the system, the hub 530c outputs an isochronous probe pulse 535. The isochronous node 532c, upon receiving the isochronous probe pulse 535, can determine that the hub to which it is attached is an isochronous-capability hub and will configure itself to conduct all future communications with the hub 530c according to an isochronous protocol. Thus, the isochronous node 532c preferably contains isochronous apparatus similar to apparatus found in the hub 530c for detecting circuitry at the other end of the link or physical medium and, thereafter, using the appropriate protocol. The isochronous node 532c, in response to receipt of the iso probe pulse 535, outputs an iso probe pulse 535. The hub 530c, upon receipt of the iso probe pulse, will commence normal isochronous hub operations.

FIG. 8E a configuration in which an Isochronous-Ethernet hub 530b is connected to an Isochronous-Ethernet node 532b. When the system is initialized the Isochronous-Ethernet hub 530b outputs a probe signal such as an isoEnet probe, on the physical medium. When the Isochronous-Ethernet node 532b receives the isoEnet probe signal it is able to determine that the hub to which it is connected is an Isochronous-Ethernet hub. The Isochronous-Ethernet node 532b then outputs an isoEnet probe signal 534 onto the physical medium which is received by the isochronous Ethernet hub 530b. When the Isochronous-Ethernet hub 530b receives an isoEnet probe signal it can determine that

the node 532b to which it is connected is an Isochronous-Ethernet node and will conduct all future communications with this particular node according to the Isochronous-Ethernet protocol.

5 FIGS. 5 and 6 depict components in the hub which are used in connection with link endpoint capability detection. As depicted in FIG. 6, a link beat generator 208 is provided for outputting the appropriate probe signal. A control signal 522 controls the multiplexer 210 so that the probe signal 208
10 is output onto the physical medium 46 at the appropriate time, e.g., upon initialization of the network system.

FIG. 9 depicts circuitry 50 in an Isochronous-Ethernet node. Circuitry 542 would be provided in a node which can operate in accordance with two protocols. Nodes which
15 provide only a single protocol would not include circuitry 542 and the E interface 59' would be connected directly to the Ethernet MAC 49c. The probe pulse received over the physical medium 46 is detected by the link beat detector circuitry 82. Circuitry 82 can include, for example a state
20 machine, for detecting the sequence and interval of the pulse or link test pulse. The link beat detector circuitry 82 outputs a mode select signal 516 for controlling the multiplexer 514. The control signal 516 is configured to set the multiplexer 514 such that the Ethernet MAC 48C is connected to the
25 output of the Isochronous-Ethernet interface 59' so that future data received over the physical medium 46 is treated in accordance with the Isochronous-Ethernet protocol. If the link beat detector 82 detects the link test pulse rather than an iso pulse signal, it outputs a mode select signal 516 which
30 configures the multiplexer 514 to connect the Ethernet MAC 48C with the Ethernet 10 Base T interface 512 so that future data received over the physical medium is treated in accordance with Ethernet 10 Base T protocol. The mode select signal 516 also provides a signal to a control circuit in a node
35 transmitter. The node transmitter is not separately depicted in detail since it is substantially identical to the hub transmitter depicted in FIG. 6.

The node transmitter control 522 in response to the mode select signal 516 (indicating receipt of a link test pulse or other probe pulse) configures the multiplexer to output an
40 appropriate pulse signal from the link beat generator 208 onto the medium 46. In some embodiments, nodes and/or hubs are configured to output a link test pulse or a probe pulse (depending on the capability of the hub or node), whenever the hub or node is powered-up. For embodiments
45 in which the link beat detect 82 is able to discriminate between a link test pulse and a probe signal such as an iso probe pulse, the mode select 516 can configure the link beat generator 208 to output a link test pulse in response to a link test pulse and an iso probe pulse in response to a probe
50 signal. The signal output by the node transmitter is received in the hub receiver 54 (FIG. 5). The hub receiver link beat detect circuitry 82 detects the output of the probe pulse from the node transmitter. When the signal is a probe signal, circuitry 82 outputs a mode select signal 516 which is
55 effective to control the multiplexer 514 to connect the output from the E interface 59' to the repeater 60. In this way, the hub receiver is now configured to process future signals received from the node over medium 46 according to an Isochronous-Ethernet protocol. The node select signal 516
60 also provides an input to control signal 522 which, in response, configures the multiplexer to place the output 206 from the encoder/serializer 202 onto the physical medium 46, rather than using the output from the 10 Base T interface 536. In this way, the transmitter is now configured to output
65 data according to the Isochronous-Ethernet protocol.

If the signal output from the node is a link test pulse rather than probe pulse, the link beat detector 82 outputs a mode

select signal **516** which configures multiplexer **514** to connect the Ethernet 10 Base T interface **512** with repeater **60** and configures the multiplexer to send output **536** onto the physical medium **46**, rather than output **206**.

In one embodiment, generation and detection of link pulses involves a number of changes of state, as described below by way of state machine descriptions and diagrams. In one embodiment, the operation can be described by three state machines, a first state machine for generating various types of link pulses ("LINKGEN"), a second state machine for detection of a 10-base T link ("LINK10BTSM") and a state machine for detection of isochronous or Isochronous-Ethernet pulses or fast link pulses ("LINKISOSM"). 10 Base T link pulses are transmitted and, in turn, detected on both sides of the medium such as the twisted pair medium, to signal the proper connectivity. In isochronous systems, the fast link pulses are generated during power-on initialization, during traumatic error recovery, or when a connection is running on emergency power. Fast link pulses can be differentiated from 10 Base T link pulses since the fast link pulses occur in bursts rather than singly. A third type of link pulse "isosleep" is used to indicate that the device originating the pulses is in a low power or "sleep" mode and to convey cycle timing. Low power mode is described in commonly assigned application, U.S. Ser. No. 08/147,359 for "Low Power Isochronous Networking Mode" filed on even date herewith and incorporated herein by reference. The 10 Base T link pulses have the form of a 100 ns pulse generated every 16 ms (FIG. 10A). In the depicted embodiment, the isolink pulse stream consists of pulse pairs. Each pair consists of a clock pulse and a data link pulse. In the depicted embodiment, the spacing between the clock pulse is 125 μ s. This value is preferred because it is the same as the public network time and it is a clock time that is readily available to the system, as described above. The clock and data link pulses are separated from each other by 62.5 microseconds. The pairs are repeated 16 times and, following the 16th transmission of a pulse pair, an additional link pulse **1006** is transmitted 62.5 microseconds after the last data link pulse position. The isolink pulse stream is depicted in FIG. 10B. As shown, clock link pulses **1002a**, **1002b** always occur, while data link pulses **1004a**, **1004b** occur to represent a data "1" (shown in phantom) and are missing to represent a data "0". Thus, the isolink pulse stream can be used to transmit information and, in one embodiment, is used to encode information such as the type of device which is transmitting, (e.g., hub versus node) the isoethernet signaling data rate, and the information content of the isoethernet channel (e.g., clear channel, ATM mode, isochronous Ethernet).

The isosleep link pulses consist of one pulse **1020a**, **1020b** transmitted every 125 μ s in phase with the transmit sync signal, as depicted in FIG. 10C.

In one embodiment, the hub initially begins generating an isoethernet "fast" link pulse to each node to which it is connected. If the far end is a 10 Base T node, this node will begin transmitting a 10 Base T link pulse after it has received the pulse or pulse train sent from the hub. If a 10 Base T node at the far end fails to receive a proper link pulse or stream of link pulses, it will enter a "link loss" state in which it will remain until it receives a specific sequence indicating that the network or link is now operable again. When the hub receives a 10 Base T link pulse from the node, it will configure itself to thereafter send out 10 Base T communications to that node.

If the far end of the link was an isoethernet node, the isoethernet node will respond to receipt of a proper isoeth-

ernet pulse train (fast link) by transmitting an isoethernet pulse train (fast link). Thereafter, both ends of the link will configure themselves to transmit in isoethernet mode.

In this way, the hub will be assured that the communication link is working properly in both directions. In certain previous systems, communications did not require a "handshake," i.e., verification of properly working link in both directions and accordingly, in these previous devices it was possible for there to be a partially broken link (e.g., a link which was operating in one direction and not the other) that went undetected.

FIG. 11 depicts the LINKGEN state machine according to one embodiment of the invention. As seen in FIG. 11, this state machine has four states. State LG1 "LINKIDLE" is an idle state in which the link generator state machine is waiting for an event to generate a link pulse. State LG2 1104 is a link pulse state. The machine waits at this state for approximately 250 ns until the end of the interval when the cycle synchronization symbol is sent before generating a data link pulse. State LG3 1106 is the link data state. The machine waits at this state to generate a data link pulse. State LG4 1108 is the link clock state. The machine waits at this state to generate a clock link pulse. Equations governing the transition between states in pseudo "C" terminology are provided in Table III. In each case, the first line indicates the condition which causes the transition of state to occur and the remaining lines indicate values that are assigned, incremented, cleared or reset. The meanings of terms in Table III are provided in Table IV.

As seen from FIG. 11, the state machine leaves the link idle state under three conditions. The first 1114 is a 10 Base T link pulse timeout designated LG11. After waiting 16 ms from the previous link pulse, a link pulse is generated. In the isosleep link pulse timeout designated LG12 (1112), after waiting 125 μ s from the previous link pulse, a link pulse is generated. In the isolink link pulse timeout designated LC13 (1110), after waiting 16 ms from the previous link pulse, a link pulse stream will be generated.

The state machine leaves the link pulse state 1104 after generating a link pulse. In the isolink data wait, after generating a link pulse, the machine makes a transition to begin timing the data link pulse. In the isolink clock wait, after generating a data link pulse, the machine makes a transition to begin timing the clock link pulse.

The machine leaves the link data state in either of two conditions. In the isolink 1 data pulse, after waiting a half cycle, a data link pulse will be transmitted. In the case of an isolink 0 data pulse, after waiting a half cycle, no data link pulse will be transmitted.

The machine leaves the link clock state 1108 in the case of an isolink clock pulse. After waiting a half cycle, a clock link pulse will be transmitted.

The 10 Base T link detection state machine ("LINK10BTSM") is depicted in FIG. 12. This state machine can be compared to the 10-Base T detector described in IEEE Standard 802.3. However, the state machine depicted in FIG. 12 includes the state "freeze-10-Base" 1202 which acts to disable this machine when fast link pulses are detected. Table V indicates the conditions for the various transitions shown in FIG. 12 and the variable assignments that are associated with each transition.

Table VI indicates the meaning of various parameters. Following a reset 1204, the machine will enter the link test reset state 1208. From this state, the machine will either remain in this state 1210, transition to the link test fail state 1212, transition to the link test extend state 1214 or transi-

tion to the freeze-10-base state **1202**. The transition to the freeze-10-base state occurs if the fastlink parameter is "true". The same conditions will also cause a transition from the link test fail state **1212** or the link test extend state to the freeze-10-Base state. Once in the freeze-10-Base state **1202**, the state machine will, by default, remain in this state **1202** as long as the fastlink parameter is "true." In this situation the freeze-10-base state will transition to the link test reset state **1208**. In this way, the state machine will respond to receipt of a normal 10-Base T link pulse but will enter the freeze state **1202** in response to receipt of a fast link pulse.

The state machine which detects a fast link pulse ("LINKISOSM") is depicted in FIG. 13. Table VII indicates the conditions which cause state transitions as well as the assignment of variables or parameters associated with state transitions. Table VIII indicates the meaning of the various parameters.

The state machine depicted in FIG. 13 has nine separate states. The iso-idle state **1302** is entered upon reset or receive activity. The isofirst pulse state **1304** is entered when a link pulse is detected but at a point when it does not yet qualify as a fast link pulse. The isofirst pass state **1306** is entered when a qualified fast link pulse is detected. The isosecond pass **1308** state is entered when a qualified second link pulse is detected. The isothird pass state **1310** is entered when a qualified third link pulse is detected. The isofast link state **1312** is entered after the requisite number of fast link pulses has been detected, but when the machine is waiting for data information or a clock pulse. The isofind clock state **1314** is entered when a clock pulse within a burst is detected. The isoshift 0 state **1316** is entered when 0 data pulse is detected and the isoshift 1 state **1318** is entered when a 1 data pulse is detected.

To distinguish between a clock pulse and a data pulse, a series of acceptance windows are defined from the beginning of the first pulse which is assumed to be a clock pulse. As depicted in FIG. 14, at the beginning of the first clock pulse **1402**, a first acceptable clock window **1404** of 31.25 μ s is defined. Thereafter, a series of acceptance windows, alternating between an acceptable data window **1406** and an acceptable clock window **1408** are defined, each of these windows having a duration of 62.5 μ s.

The state machines, described above, can be implemented in the context of a number of circuitry components. In one embodiment, the circuitry components include a link timer, FIG. 15A, a number of link registers **1502** (FIG. 15B), coupled to a link comparator **1504**, the link ISO state machine (FIG. 15C) and the link 10 Base T state machine (FIG. 15D). Table IX describes the function of the various signal lines depicted in FIG. 15A-15D, not previously described.

In general, the link timer circuit **1506** provides a number of timers which are used by the state machines to distinguish between pulse signals and other signals and to distinguish between various types of pulses and pulse streams, as described above. A number of the timers found in these circuits, and the function and default values, are listed in Table X.

The link registers **1502** are used for storing information, including information encoded in the data pulses of the isoethernet pulse stream and for outputting information, such as information extracted from the data pulses.

In view of the above description, a number of advantages of the present invention can be seen. The present invention allows a network to be configured in a mixed protocol or mixed environment, with, for example, a single hub con-

5 nected to a plurality of nodes which operate according to
different protocols, with the configuration being achieved
automatically, without the need for manually establishing a
predetermined protocol beforehand for each node. The
present invention permits networks to be upgraded incre-
mentally so that it is not necessary to upgrade all nodes at the
same time. Furthermore, it is not, in general, necessary for
service personnel to specifically configure nodes or hubs to
accommodate particular protocols since the protocols are
10 determined automatically and the nodes and hub configure
themselves in accordance with the determined protocols.

A number of variations and modifications of the present
invention can be used. Although an embodiment involving
15 a 10 Base T protocol and an Isochronous-Ethernet protocol
was described, the present invention can be made applicable
to other protocols, including other LAN protocols such as a
token ring protocol, an isochronous protocol and the like.
Although the present invention described one particular
20 signal characteristic used for determining the protocol, other
characteristics could also be used. For example, a token ring
could be detected by the presence of four or 16 Mbit/sec
Manchester-encoded data. Other LANs can be detected by
their unique timing and data patterns. Protocols could also
25 be detected using such characteristics as the pattern of the
presence or absence of a carrier, and the frequency spectrum
of signals placed onto the physical medium. When a node
has a capability of communicating under two or more
protocols, e.g. either an Isochronous-Ethernet protocol or a
30 pure Ethernet protocol, it would be possible for a hub to use
both capabilities of a node, i.e., to communicate according
to a first protocol during a first time period and a second
protocol during a second time period. Although the present
invention has been described in the context of a star topol-
35 ogy, the invention could also be used in a non-star topology,
such as a ring topology or a tree topology. The present
invention can be used in networks which do not have a hub,
such as direct connections between two nodes with each
node determining the protocol capabilities of the other node.
40 As described above, the link test pulse and iso probe signals
are related in that, for example, a 10 Base T node will
respond in the same fashion to receipt of either type of pulse.
However, the test signals could be provided in forms which
are unique to each type of protocol. In such a system, a data
45 source/sink would output a first type of test pulse or other
signal and, if no response was received, would output a
second type of test pulse or signal, and so forth until a
response was received indicating the protocol capability at
the other end of the link. A data source/sink could be
50 configured to determine all possible protocol capabilities of
the apparatus at the other end of the link, rather than
determining the "highest" or "best" capability available or
using the first capability detected. The devices at each end
could select a protocol capability other than the "highest" or
55 "best" capability. It would be possible for a node to store an
indication of its capabilities, such as in a table or other
memory device, and to output the information upon receiv-
ing an inquiry. It would also be possible for a network to
initialize in a common protocol, e.g., a 10 Base T protocol,
60 and, thereafter, exchange information, using that protocol,
indicating additional protocol capabilities of the components
of the system. Thereafter, the systems could reconfigure
themselves to use desired ones of the available protocols.

Although the present invention has been described by way
65 of preferred embodiments and certain variations and modi-
fications, other variations and modifications can also be
used, the invention being defined by the following claims.

BLOCK 0:

BLOCK 1:

BLOCK 2:

BLOCK 3.

TABLE IB

BLOCK 0:

BLOCK 1

BLOCK 2:

[illegible]

TABLE IB-continued

B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	Group22
B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	I	I	Group23
BLOCK 3:																	
I	M	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	Group24
B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	Group25
B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	Group26
B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	Group27
B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	Group28
B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	Group29
B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	Group30
B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	I	I	Group31

JK = Frame Synchronization Pattern

M = Maintenance Channel

D = D Channel

I = Idle Data

B = Isochronous Channel

TABLE II

20

Symbol	Encoded (5 bit)	Description	
0	11110	Data 0	
1	01001	Data 1	
2	10100	Data 2	
3	10101	Data 3	25
4	01010	Data 4	
5	01011	Data 5	
6	01110	Data 6	
7	01111	Data 7	
8	10010	Data 8	
9	10011	Data 9	30
A	10110	Data A	
B	10111	Data B	
C	11010	Data C	
D	11011	Data D	
E	11100	Data E	
F	11101	Data F	35
I	11111	No Ethernet Carrier	
S	11001	No Ethernet Data	
V	01100	Unaligned Data	
T	01101	Unassigned	
J	11000	Frame Sync Part 1	
K	10001	Frame Sync Part 2	40
Q	00000	Invalid	
H	00100	Invalid	
R	00111	Invalid	
V	00001	Invalid	
V	00010	Invalid	
V	00011	Invalid	45
V	00101	Invalid	
V	00110	Invalid	
V	01000	Invalid	
V	10000	Invalid	

50

TABLE III

LG 13:	isolink & 16ms clr 16ms index = 0 clr 62.5us lp = 1	55
LG 11:	10baseT & (16 ms txen) clr 16ms lp='txen	
LG 12:	isosleep & sync clr 16ms	60
LG 21:	!sync lp = 1	
LG 34	62.5 μ s clr 62.5 lp=data[index]	65

20 TABLE III-continued

	LG 43	62.5 μ s & (index!=15) lp=1
		inc index
25	LG 41	62.5 μ s & (index==15) lp=1

TABLE IV

30	Term	Meaning	Value
	isolink	Enables Generation of isolink pattern	Not Applicable
	16ms	16 ms timer	16 ms
	62.5us	62.5 μ s timer	62.5 μ s
	lp	link pulse	Not Applicable
35	txen	Transmit enable	Not Applicable
	isosleep	Enables Generation of link low power link pulses	Not Applicable
	sync	Signal from template generator indicating start of cycle	Not Applicable
40	10 Base T	Enable, Generation of 10 Base T link pulses	Not Applicable

TABLE V

45	1 reset
	10baset = 1
	linkgood = 1
	setlmt = 1
	setlmt = 1
	bp1 = receive + (linkpulse * lmtDone)
50	10baset = 1
	linkgood = 1
	setlmt = 1
	setlmt = 1
	bp2 = fastlink
55	bp3 = lldone * receive * linkpulse
	loadlc = 1
	10baset = 1
	bp4 = receive
	10baset = 1
	bp5 = fastlink
60	bp6 = receive * linkpulse
	10baset = 1
	setlmt = 1
	setlmt = 1
	bp7 = LCDone + receive
	10baset = 1
65	bp8 = fastlink

TABLE V-continued

bp9 = linkpulse * lmtDone lObaset = 1 decic = 1	5
bp10 = receive * ltxtDone + linkpulse * lmtDone lObaset = 1 loadic = 1	
bp11 = receive * txe lObaset = 1 linkgood = 1 setlmt = 1 setlmt = 1	10
bp12 = fastlink* receive * txe	
bp13 = receive lObaset = 1	15
bp14 = receive lObaset = 1	
bp15 = fastlink loadic = 1 lObaset = 1	20

TABLE VI

Term	Meaning	Value	
lObaset	Enable lObase-T Mode	Not Applicable	25
linkgood	lObaset state machine has detected good link pulses	Not Applicable	
setlmt	Set Limit Loss Timer	Not Applicable	
setlmt	Set Link Timer Min Time	Not Applicable	
receive	Now Called ipact	Not Applicable	30
linkpulses	Link Pulses from Front End	Not Applicable	
lmtDone	Link Time Min Timer Done	4 ms	
fastlink	Iso Link Detector	Not Applicable	
ltdone	Link Loss Timer Done	60 ms	
loadic	Load Link Counter Counts Link Pulses	Not Applicable	
setltx	Set Link Test Max Timer - Same as sltx	Not Applicable	35
LCDone	Link Counter Done	Not Applicable	
decic	Decrement Link Counter	Not Applicable	
ltxDone	Link Test Max Timer Done	32 ms	
txe	Transmit Enable	Not Applicable	
txc	Transmit Clock	Not Applicable	40

TABLE VII

bp1 = linkpulse setfimt = 1	45
bp2 = flmtDone	
bp3 = linkpulse * flmtDone setfimt = 1	
bp4 = flmtDone	
bp5 = linkpulse * flmtDone setfimt = 1	50
bp6 = flmtDone	
bp7 = linkpulse * flmt + Done setfimt = 1 fastlink = 1	
bp8 = flmtDone * linkpulse fastlink = 1 setfimt = 1	55
bp9 = flmtDone fastlink = 1 setltx = 1	
bp10 = receive setltx = 1 fastlink = 1	60
bp11 = receive * ltxDone resetreg = 1	
bp12 = linkpulse setltx = 1 setltx = 1 setltx = 1 fastlink = 1	65

TABLE VII-continued

5	bp13 = ltmDone
	fastlink = 1
	shiftrow = 1
	bp14 = linkpulse * fldtDone
	shift1 = 1
10	setltxt = 1
	setltmt = 1
	fastlink = 1
	bp15 = linkpulse * fldtDone
	setltxt = 1
15	setltmt = 1
	setfldt = 1
	fastlink = 1
	bp17 = linkpulse * fldtDone
	setltxt = 1
20	setltmt = 1
	setfldt = 1
	fastlink = 1
	bp18 = ltmDone
	fastlink = 1
25	shiftrow = 1
	unconditional
	setfldt = 1
	setltmt = 1
	setltxt = 1
30	fastlink = 1

TABLE VIII

	Term	Meaning	Value
30	setflmt	Set Fast Link Max Timer	156.25 μ s
	flmtDone	Fast Link Max Timer Done	Not Applicable
	resetreg	Reset Registers - Used to clear registers upon loss of carrier	Not Applicable
35	setfldt	Set Fast Link Data Timer	93.75 μ s
	shiftrow	Shift Pointer to next row of link data shift register	Not Applicable
	fldtDone	Fast Link Data Timer Done	Not Applicable
	shift1	Shift a 1 bit into the link data shift register	Not Applicable
	shift0	Shift a 0 bit into the link data shift register	Not Applicable
40			

TABLE IX

	Signal	Meaning
45	ethclock	Ethernet clock
	farack	Far acknowledge - used in link protocol
	isogood	Used to indicate isolink pattern good
50	isotype	field in isolink pattern indicating ISO usage - normal, wideband, none, reserved
	loadrxmode	Load receive mode register
	porttype	Field in isolink pattern indicating port type - node, hub
55	reset	Hardware reset
	resetlink	Reset signal used to clear contents of the receive link registers
	rxmodebus	Conveys the contents of the received link pattern
60	setackrx	Set receive link acknowledge bit
	setlim	Set link initialization match - used to indicate that the link pattern was received consistently 3 times and was compatible with mode of device
	setlinm	Set link initialization no match - used to indicate that the link pattern was received consistently 3 times and was not compatible with mode of device
65		

TABLE IX-continued

Signal	Meaning	
temptype	Template type - field in link pattern - isoenet, isotoken, reserved	5
txe	Transmit enable	
window	Used to frame a group of link pulses to ensure that there is exactly 16 bits	10
tmodebus	Link pattern to be transmitted conveyed by this bus	

TABLE X

Term	Meaning	Value	
llt	Link Loss Timer	60 ms	
ltmt	Link Test Min Timer	4 ms	
lxt	Link Test Max Timer	32 ms	
flmt	Fast Link Max Timer	156.25 μ s	20
fldt	Fast Link Data Timer	94 μ s	
ipact	Input Packet from Squelch	Not Applicable	
sflmt	Set Fast Link Max Timer	Not Applicable	
sltxt	Set Link Test Max Timer	Not Applicable	

What is claimed is:

1. In a network having at least a first data source/sink and a second data source/sink coupled together by a physical medium, apparatus for determining at least one protocol capability of said second data source/sink, comprising:

first means, coupled to said first source/sink, for placing a first signal onto said physical medium, said first signal indicating a first protocol capability of said first source/sink;

second means, coupled to said second data source/sink, for receiving said first signal,

third means, coupled to said second data source/sink, for transmitting a second signal onto said physical medium when said second data source/sink has said first protocol capability, said second signal comprising a plurality of pulses spaced-apart by a first time interval, and a third signal, different from said second signal, when said second data source/sink has a second protocol capability, said third signal comprising a plurality of pulses spaced-apart by a second time interval, different from said first time interval;

fourth means, coupled to said first data source/sink, for detecting whether said signal transmitted by said second means is said second signal or said third signal, and

fifth means, coupled to said first data source/sink, for establishing communication with said second data source/sink using said first protocol if said fourth means detects said second signal and using said second protocol if said fourth means detects said third signal.

2. Apparatus, as claimed in claim 1, wherein said first time interval is about 125 microseconds.

3. Apparatus, as claimed in claim 1, wherein said second time interval is about 16 milliseconds.

4. Apparatus, as claimed in claim 1, wherein said second signal further comprises a plurality of data pulses.

5. Apparatus, as claimed in claim 4, wherein each of said data pulses is generated a predetermined time interval after one of said plurality of pulses of said second signal.

6. Apparatus, as claimed in claim 5, wherein said predetermined time interval is about 62.5 microseconds.

7. In a network having at least a first data source/sink and a second data source/sink coupled together by a physical medium, a state machine apparatus for generating a first

signal for transmission over said physical medium, comprising:

- means for receiving said first signal over physical medium indicating a communication protocol capability of a first source/sink;
- means for determining whether said first signal has a first period or a second period, said second period being shorter than said first period;
- means for outputting a second signal, having said first period, when said first signal has said first period;
- means for preventing output of said second signal when said first signal has said second period.

8. In a network having at least a first data source/sink and a second data source/sink coupled together by a physical medium, a state machine apparatus for generating a first pulsed signal for transmission over said physical medium, comprising:

- means for receiving said first pulsed signal over said physical medium indicating a communication protocol capability of a first source/sink;
- means for determining whether said first pulsed signal has a first period or a second period, said second period being shorter than said first period;
- means for outputting a second signal, having said second period, when said first signal has said second period and after a predetermined number of pulses of said first signal have been received.

9. Apparatus, as claimed in claim 8, wherein said predetermined number of pulses is three.

10. Apparatus, as claimed in claim 8 wherein said first pulsed signal comprises a plurality of periodic pulses and a plurality of data pulse windows located a predetermined period after each of said periodic pulses and further comprising:

- means for determining the state of said first signal in at least some of said plurality of data pulse windows.

11. In a network having at least a first data source/sink and a second data source/sink coupled together by a physical medium, a method for determining at least one protocol capability of said second data source/sink, comprising:

- placing a first signal onto said physical medium by said first data source/sink, said first signal indicating a first protocol capability of said first source/sink;
- receiving said first signal in said second data source/sink, transmitting a second signal onto said physical medium by said second source/sink when said second data source/sink has said first protocol capability, said second signal comprising a plurality of pulses space-apart by a first time interval, and outputting a third signal, different from said second signal, when said second data source/sink has a second protocol capability, said third signal comprising a plurality of pulses spaced-apart by a second time interval, different from said first time interval;
- detecting, in said first data source/sink, whether said signal transmitted by said second means is said second signal or said third signal, and
- establishing communication with said second data source/sink using said first protocol if said fourth means detects said second signal and using said second protocol if said fourth means detects said third signal.

12. A method, as claimed in claim 11, wherein said second signal further comprises a plurality of data pulses.

13. A method, as claimed in claim 12, wherein each of said data pulses is output a predetermined time interval after one of said plurality of pulses of said second signal.

14. In a network having at least a first data source/sink and a second data source/sink coupled together by a physical medium, a method for determining at least one protocol capability of the second data source/sink, comprising:

placing first data pulses onto the physical medium, the first data pulses indicating a first protocol capability of the first source/sink;

receiving the first data pulses in the second data source/sink;

transmitting second data pulses onto the physical medium from the second data source/sink, wherein the second data pulses indicate the first protocol capability when the second data source/sink has the first protocol capability, wherein the second data pulses indicate a second protocol capability when the second data source/sink has the second protocol capability;

detecting whether the second pulses indicate the first protocol capability or the second protocol capability; and

establishing communication with the second data source/sink using the first protocol if the second data pulses indicate the first protocol capability and using the second protocol if the second data pulses indicate the second protocol capability.

15. In a network having at least a first data source/sink and a second data source/sink coupled together by a physical medium, a method for determining a communication protocol capability for data for transmission over the physical medium, comprising:

receiving first data pulses over the physical medium;

determining whether the first data pulses indicate a first communication protocol capability;

selectively outputting second data pulses in response to the first data pulses, wherein the second data pulses are output if the second data source/sink operates in accordance with the first communication protocol capability; and

preventing output of the second data pulses if the second data source/sink does not operation in accordance with the first communication protocol capability.

16. A method for communicating data between a first data source/sink and a second data source/sink, the second data source/sink operating in accordance with a plurality of protocol capabilities, the method comprising the steps of:

storing information in a first storage location in the first data source/sink;

extracting information from data pulses transmitted from the second data source/sink to the first data source/sink and storing the extracted information in a second storage location;

at the first data source/sink, determining the protocol capabilities of the second data source/sink; and

determining the method for communicating data between the first data source/sink and the second data source/sink based upon the determined protocol capabilities of the second data source/sink.

17. The method of claim 16, wherein the first or second storage locations comprise a register, a memory or a table.

18. The method of claim 16, wherein the information stored in the first storage location is encoded into data pulses and transmitted from the first data source/sink to the second data source/sink.

19. The method of claim 16, wherein a state machine determines the protocol capabilities of the second data source/sink.

20. The method of claim 16, wherein the data communicated between the first data source/sink and the second data source/sink comprises an isochronous data.

21. The method of claim 20, wherein the isochronous data comprises video data.

22. The method of claim 20, wherein the isochronous data comprises telephone data.

23. The method of claim 16, wherein the data is communicated between the first data source/sink and the second data source/sink in accordance with a protocol selected from the group consisting of: isochronous token ring, isochronous Ethernet, non-isochronous Ethernet, FDDI-II, and X.25.

24. The method of claim 16, wherein the first and second data sources/sinks comprise a portion of a star topology network.

25. The method of claim 16, wherein the first and second data sources/sinks comprise a portion of a non-star topology network.

26. The method of claim 16, wherein the first and second data sources/sinks comprise a portion of a ring topology network.

27. The method of claim 16, wherein the first and second data sources/sinks comprise a portion of a tree topology network.

28. The method of claim 16, wherein a physical medium coupled between the first data source/sink and the second data source/sink comprises a twisted pair, coax cable or fiber optic.

29. A method for communicating data between a first data source/sink and a second data source/sink, the method comprising the steps of:

communicating data between the first data source/sink and the second data source/sink in accordance with a first communication protocol;

exchanging information between the first data source/sink and the second data source/sink that indicates protocol capabilities of the first and/or second data source/sinks; reconfiguring the first and second data source/sinks; and communicating data between the first data source/sink and the second data source/sink in accordance with a second communication protocol.

30. The method of claim 29, wherein the information that indicates protocol capabilities is stored in a register, a memory or a table.

31. The method of claim 29, wherein a state machine determines the protocol capabilities of the data sources/sinks.

32. The method of claim 29, wherein data communicated between the first data source/sink and the second data source/sink comprises an isochronous data.

33. The method of claim 32, wherein the isochronous data comprises video data.

34. The method of claim 32, wherein the isochronous data comprises telephone data.

35. The method of claim 29, wherein the data is communicated between the first data source/sink and the second data source/sink in accordance with a protocol selected from the group consisting of: isochronous token ring, isochronous Ethernet, non-isochronous Ethernet, FDDI-II, and X.25.

36. The method of claim 29, wherein the first and second data sources/sinks comprise a portion of a star topology network.

37. The method of claim 29, wherein the first and second data sources/sinks comprise a portion of a non-star topology network.

38. The method of claim 29, wherein the first and second data sources/sinks comprise a portion of a ring topology network.

39. The method of claim 29, wherein the first and second data sources/sinks comprise a portion of a tree topology network.

40. The method of claim 29, wherein a physical medium coupled between the first data source/sink and the second data source/sink comprises a twisted pair, coax cable or fiber optic.

41. A method for communicating data between a first data source/sink and a second data source/sink, the method comprising the steps of:

exchanging information between the first data source/sink and the second data source/sink that indicates protocol capabilities of the first and/or second data sources/sinks, wherein the protocol capabilities of the first and second data sources/sinks include at least first and second protocol capabilities;

communicating data between the first data source/sink and the second data source/sink in accordance with a first communication protocol at a first point in time;

configuring the first and second data source/sinks to operate in accordance with a second communication protocol; and

communicating data between the first data source/sink and the second data source/sink in accordance with the second communication protocol.

42. The method of claim 41, wherein the information that indicates protocol capabilities is stored in a register, a memory or a table.

43. The method of claim 41, wherein a state machine determines the protocol capabilities of the data sources/sinks.

44. The method of claim 41, wherein data communicated between the first data source/sink and the second data source/sink comprises an isochronous data.

45. The method of claim 44, wherein the isochronous data comprises video data.

46. The method of claim 44, wherein the isochronous data comprises telephone data.

47. The method of claim 41, wherein the data is communicated between the first data source/sink and the second data source/sink in accordance with a protocol selected from the group consisting of: isochronous token ring, isochronouse Ethernet, non-isochronous Ethernet, FDDI-II, and X.25.

48. The method of claim 41, wherein the first and second data sources/sinks comprise a portion of a star topology network.

49. The method of claim 41, wherein the first and second data sources/sinks comprise a portion of a non-star topology network.

50. The method of claim 41, wherein the first and second data sources/sinks comprise a portion of a ring topology network.




51. The method of claim 41, wherein the first and second data sources/sinks comprise a portion of a tree topology network.

52. The method of claim 41, wherein a physical medium coupled between the first data source/sink and the second data source/sink comprises a twisted pair, coax cable or fiber optic.

ABSTRACT

Support for a mixed network environment is provided which can contain multiple isochronous and/or non-isochronous LAN protocols such as Isochronous-Ethernet, Ethernet, isochronous-token ring, token ring, other isochronous-LAN or other LAN Systems. Support for a mixed environment includes a protocol detection mechanism which is embodied in a handshaking scheme. This handshaking scheme determines the signalling capability at the end points of the link and implements the correct protocol. This enables isochronous nodes and hubs to automatically detect the presence of Ethernet, token ring, or other LAN equipment at the other end of the network cable. If this detection occurs, the isochronous LAN equipment will fall-back to a LAN compliant mode of operation. Typically, only the hub will have the capability of operating in different networking modes, such as Ethernet, Token Ring isochronous modes. The hub will listen for some form of identification from the attached nodes as to the type of service to provide— isochronous or non-isochronous; Ethernet, token ring or other LAN service.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
22

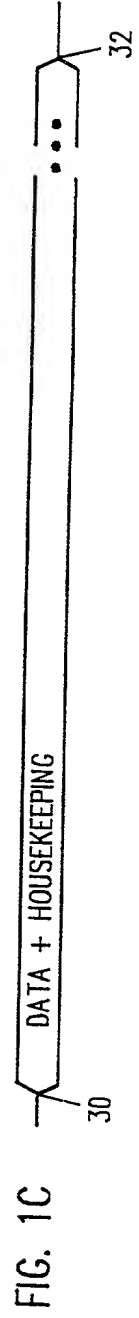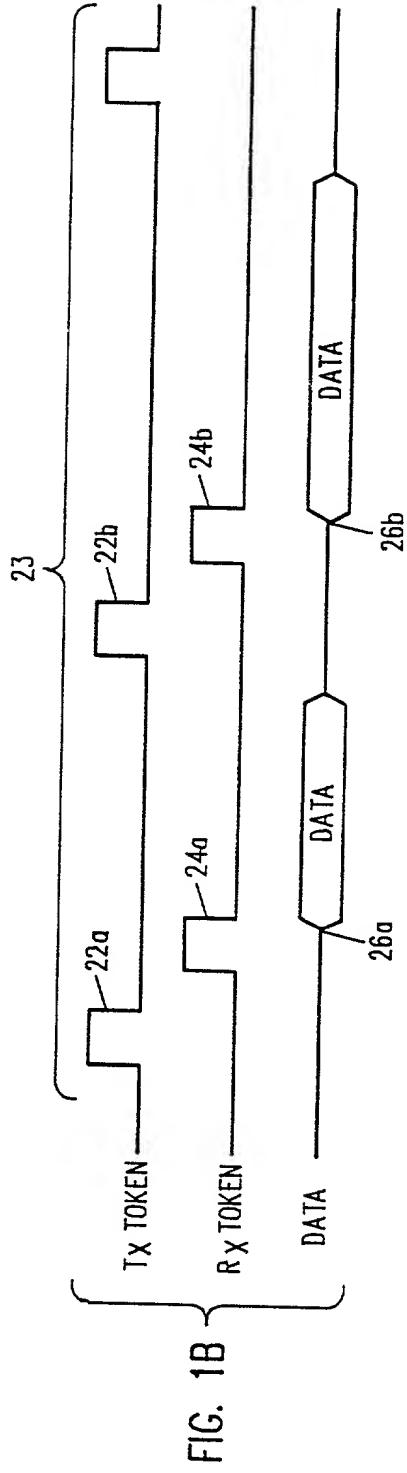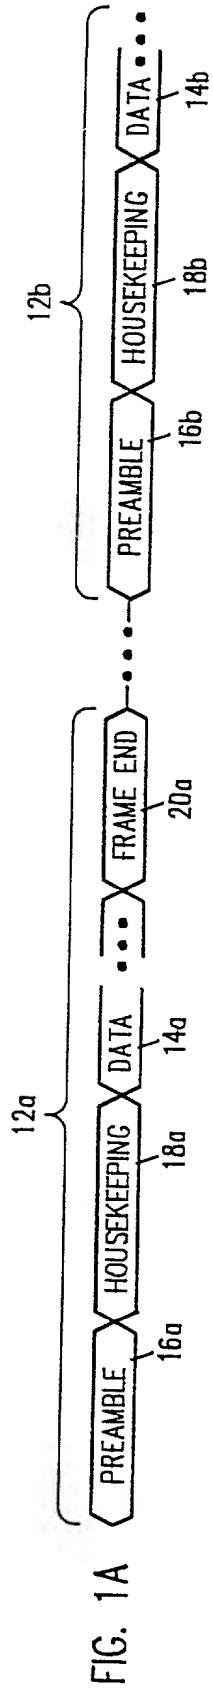

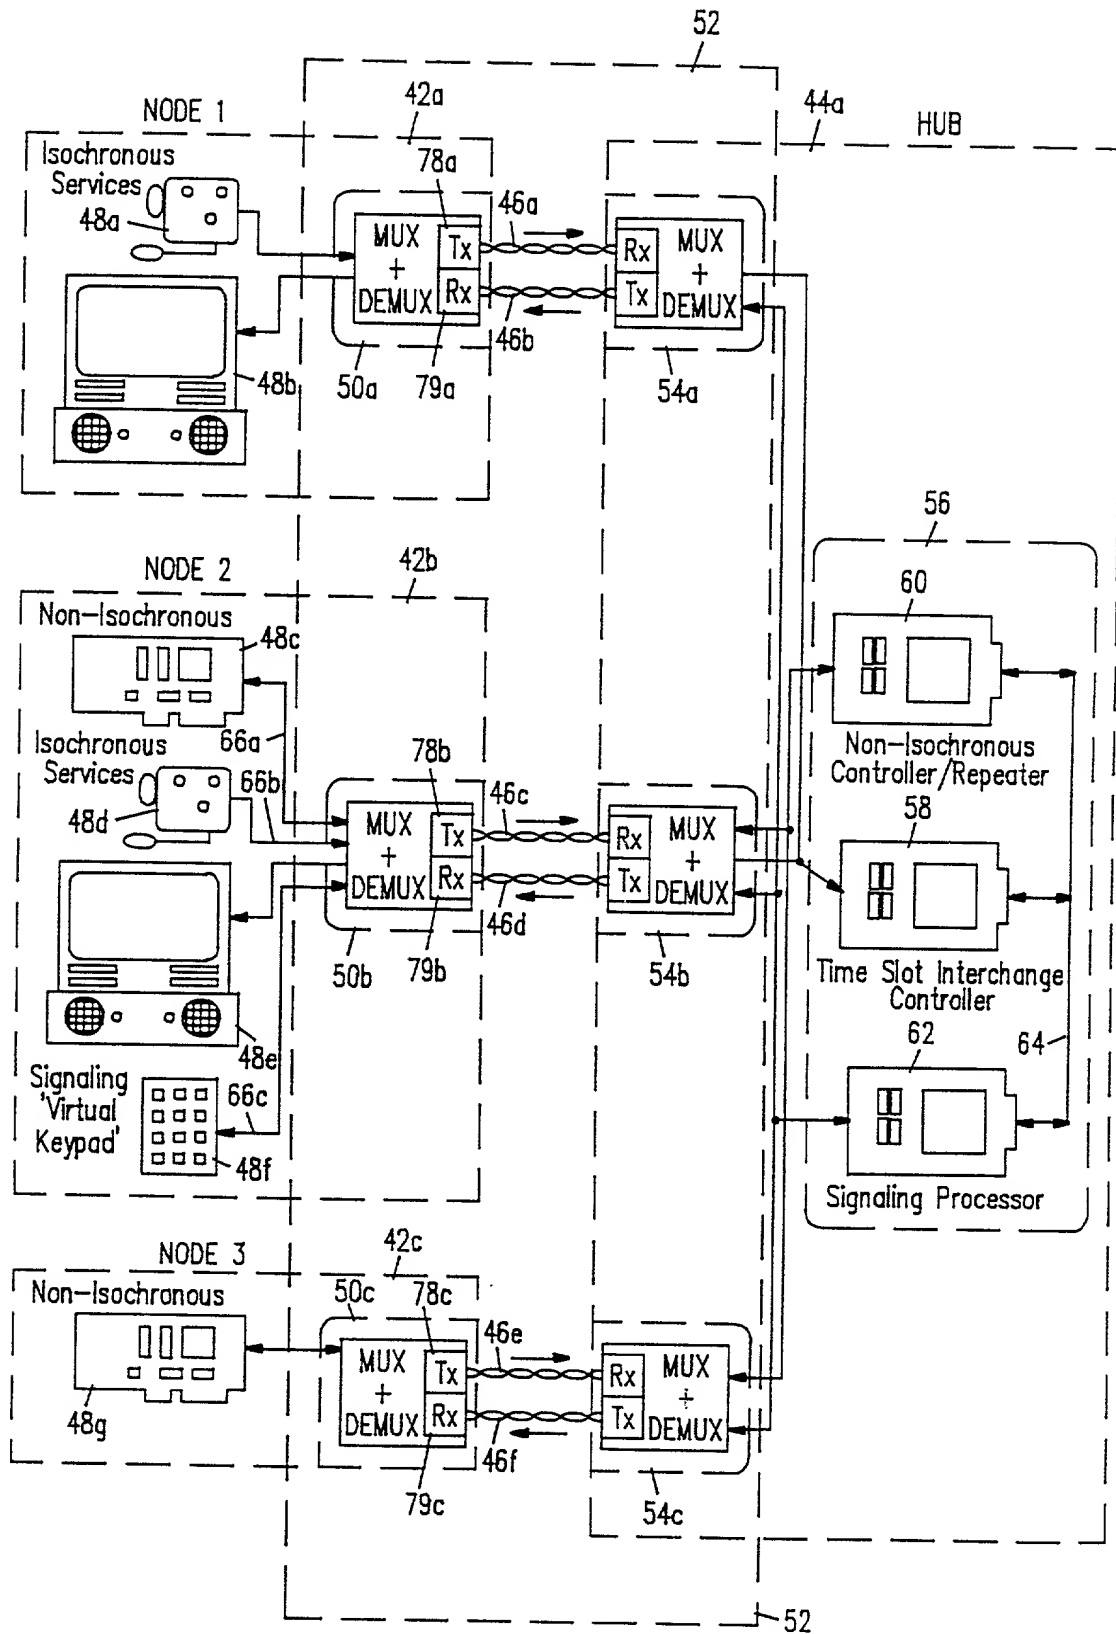


FIG. 2

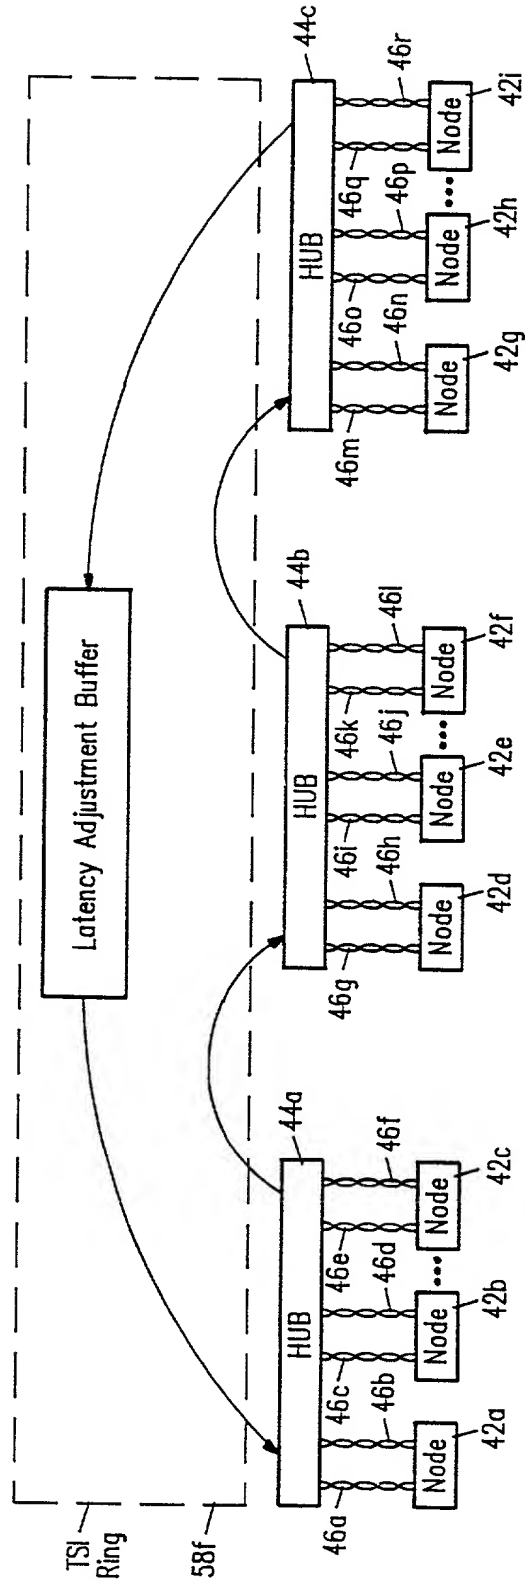


FIG. 3

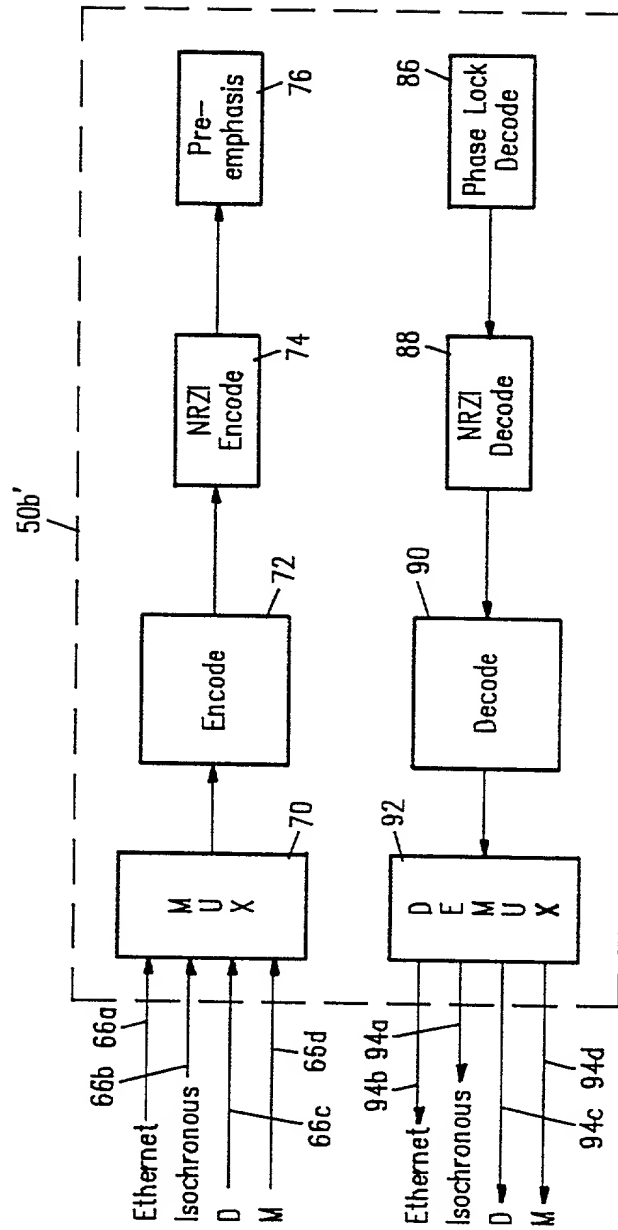


FIG. 4

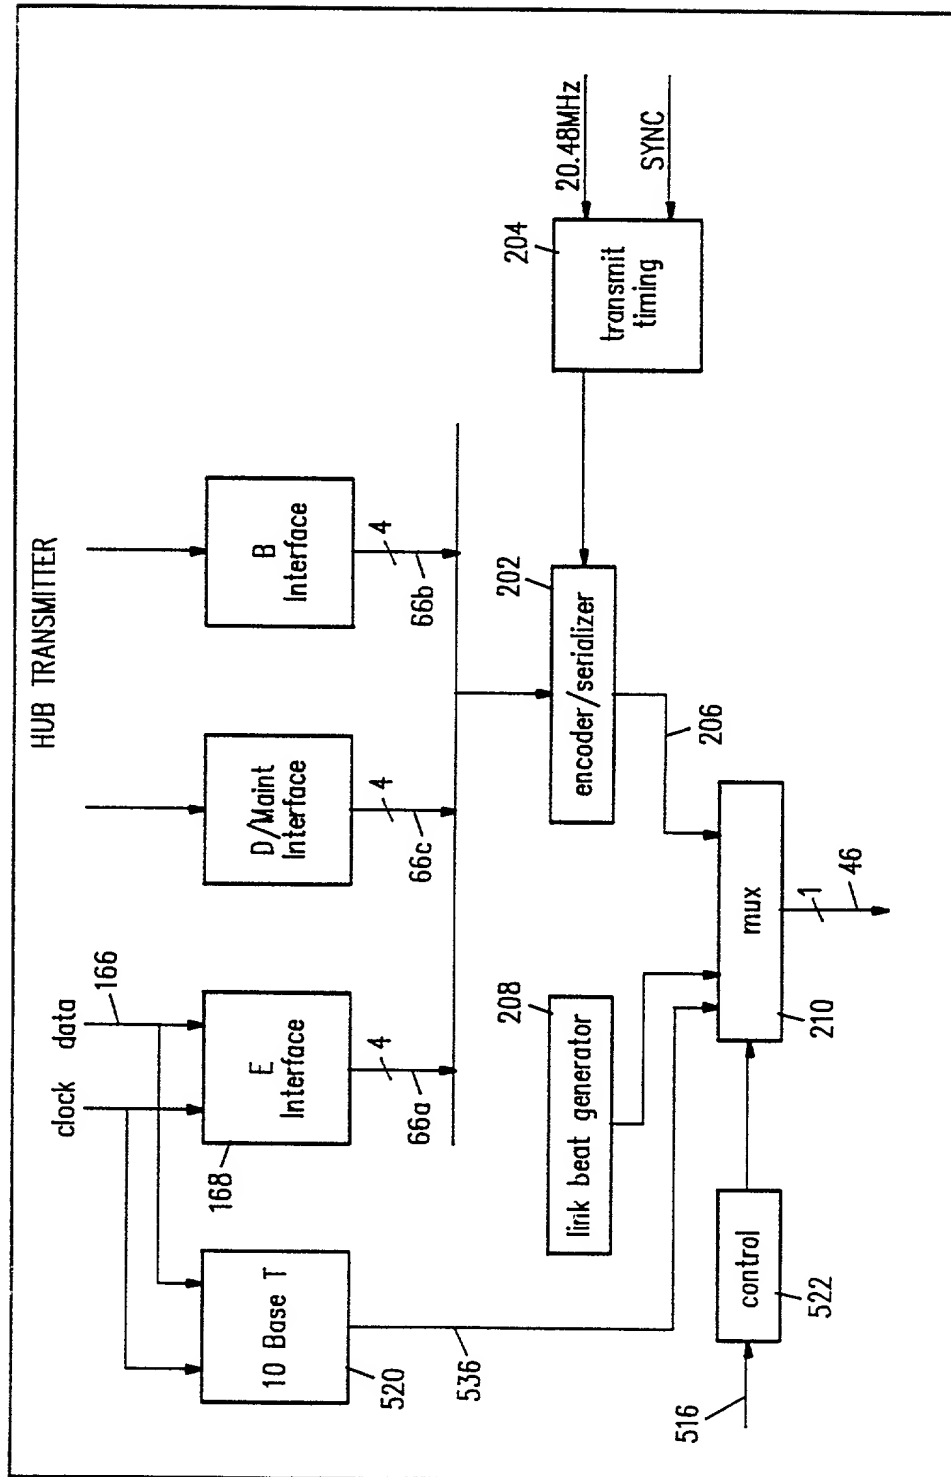


FIG. 6

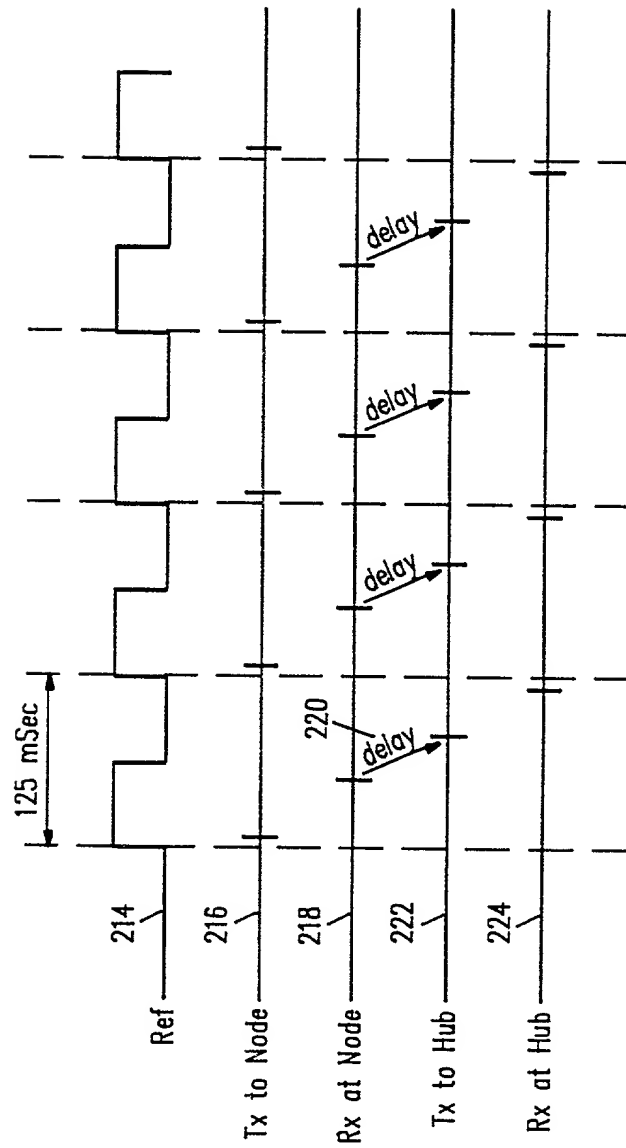


FIG. 7

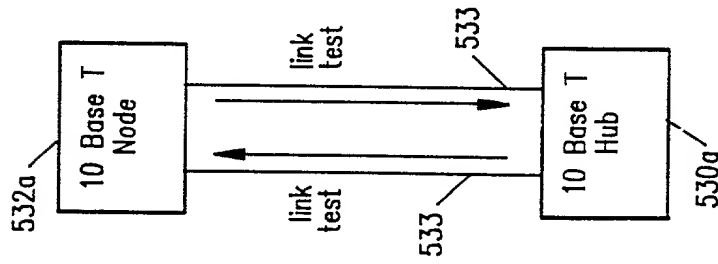


FIG. 8A

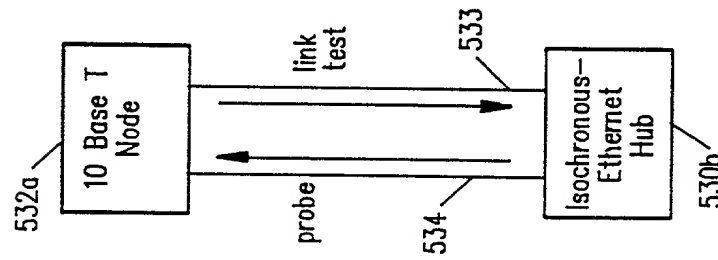


FIG. 8B

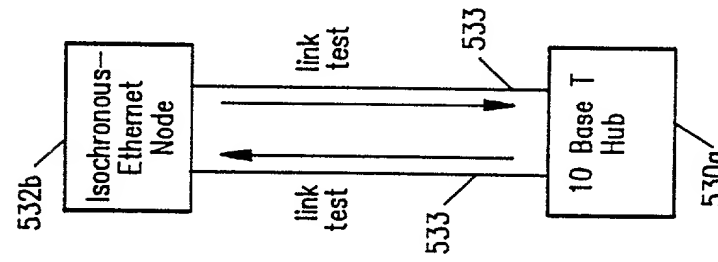


FIG. 8C

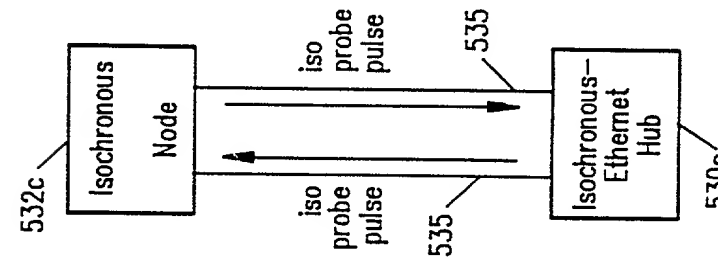


FIG. 8D

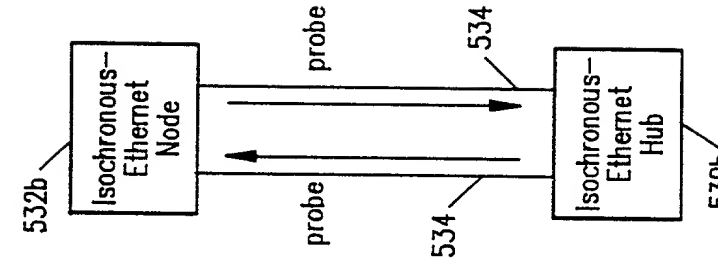


FIG. 8E

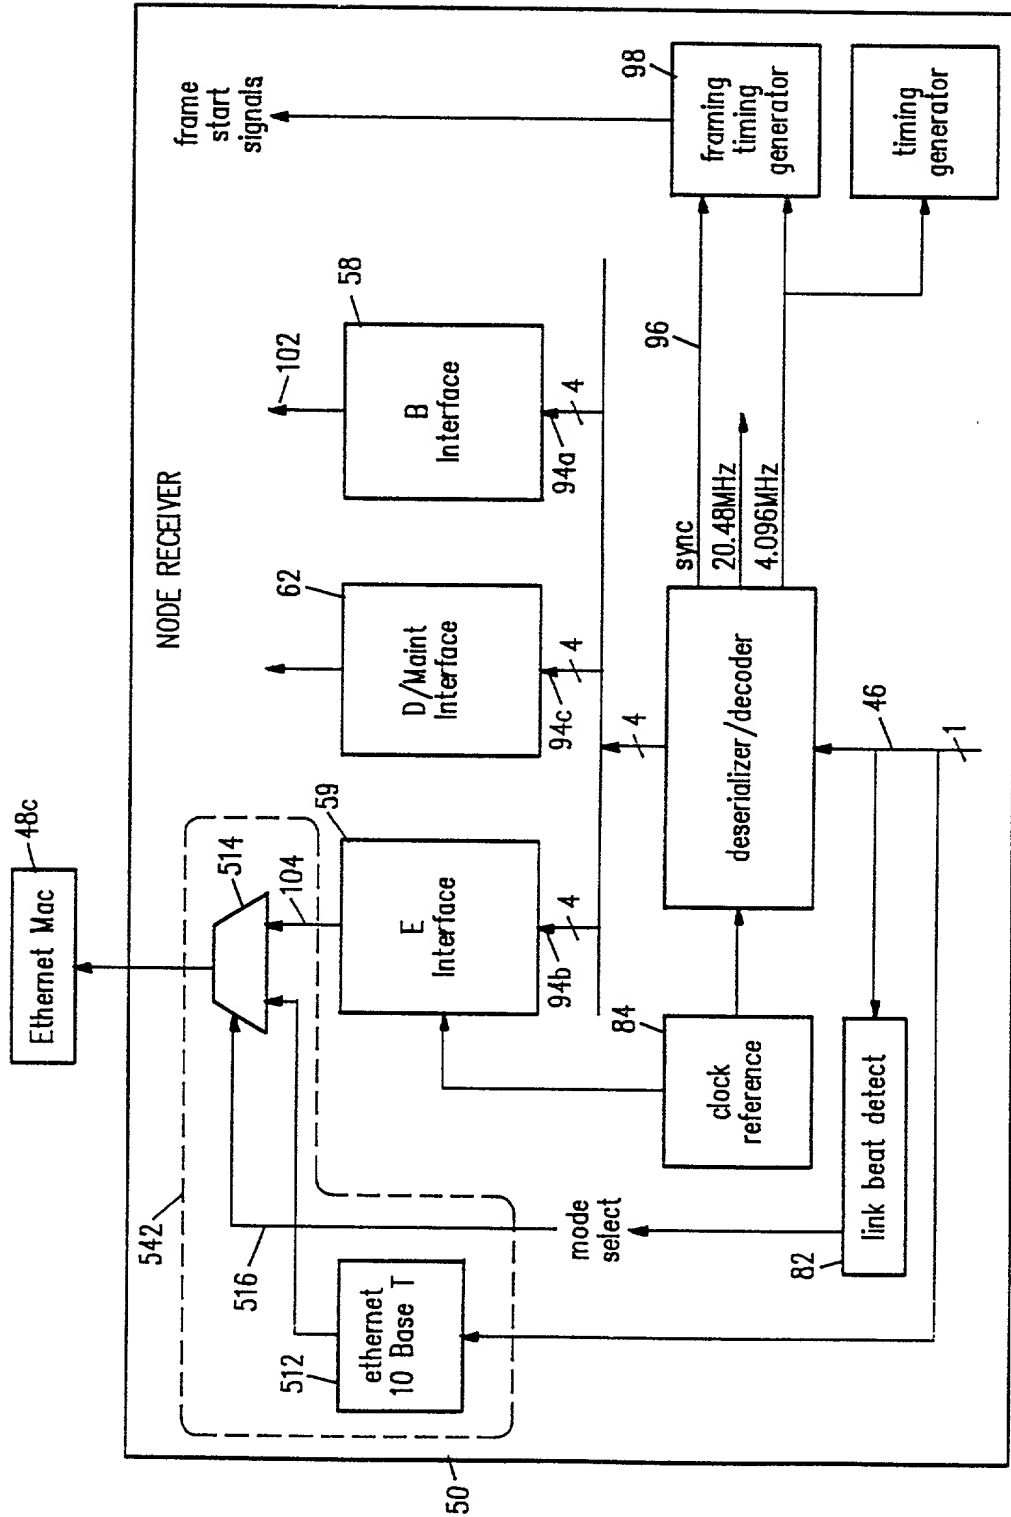


FIG. 9

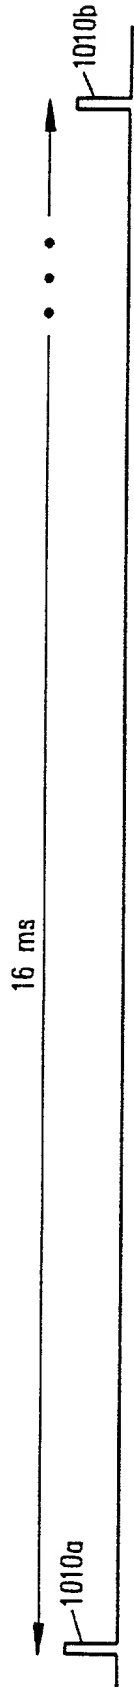


FIG. 10A

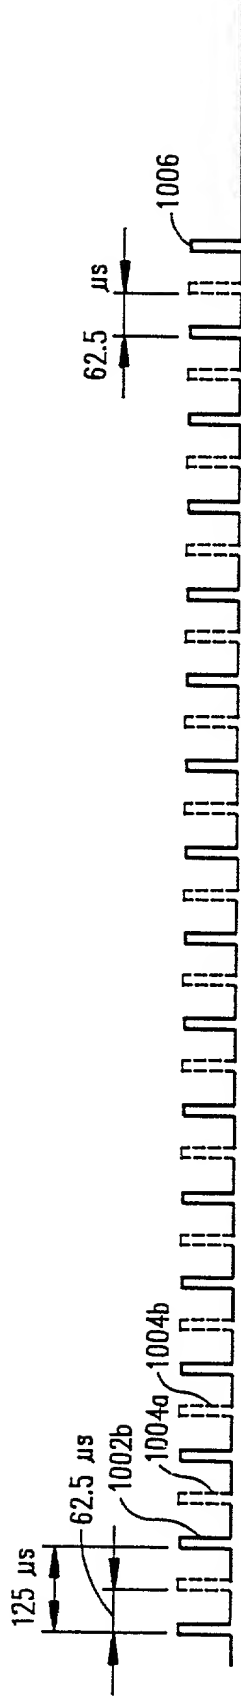


FIG. 10B

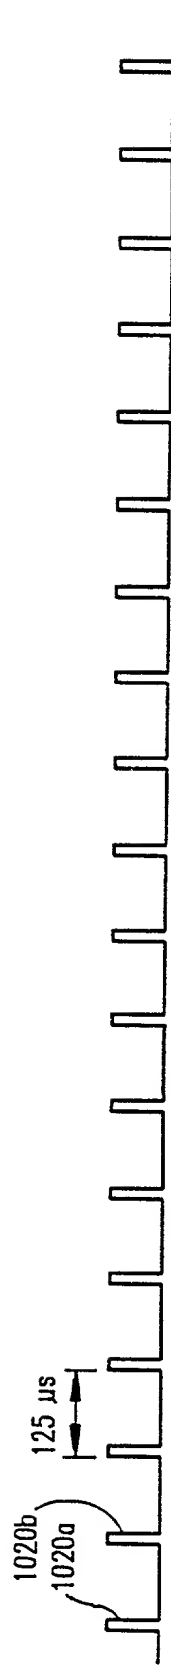


FIG. 10C

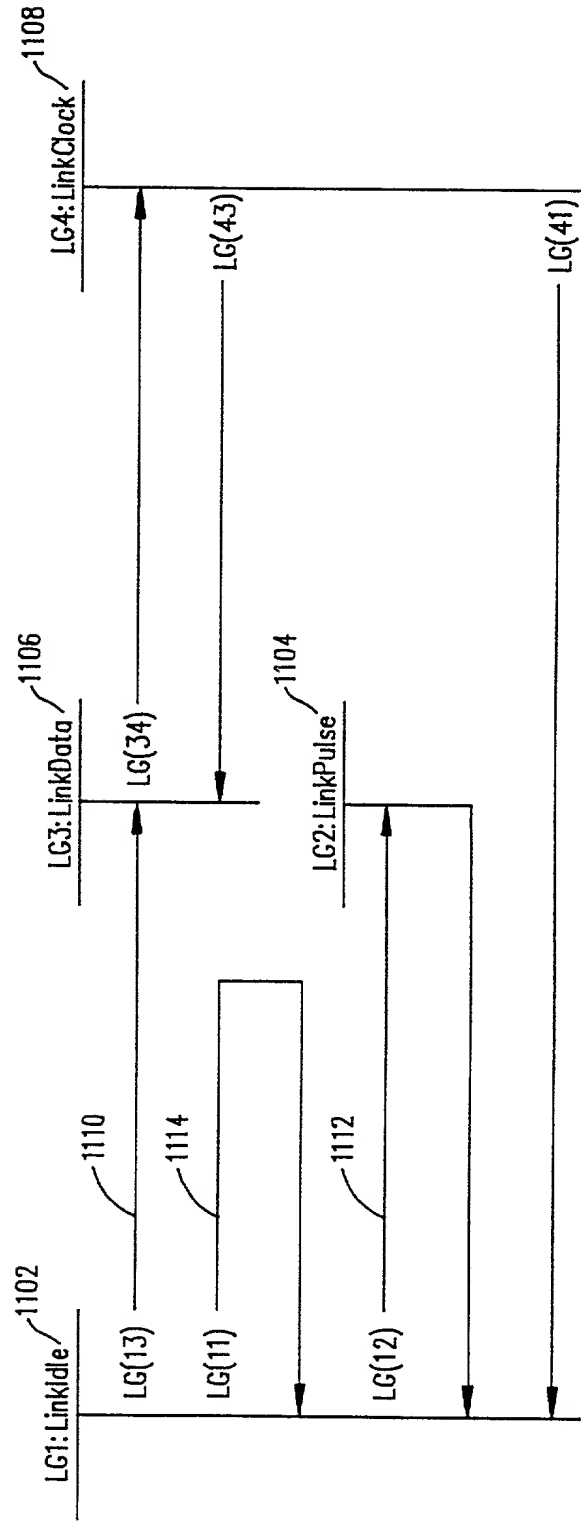


FIG. 11

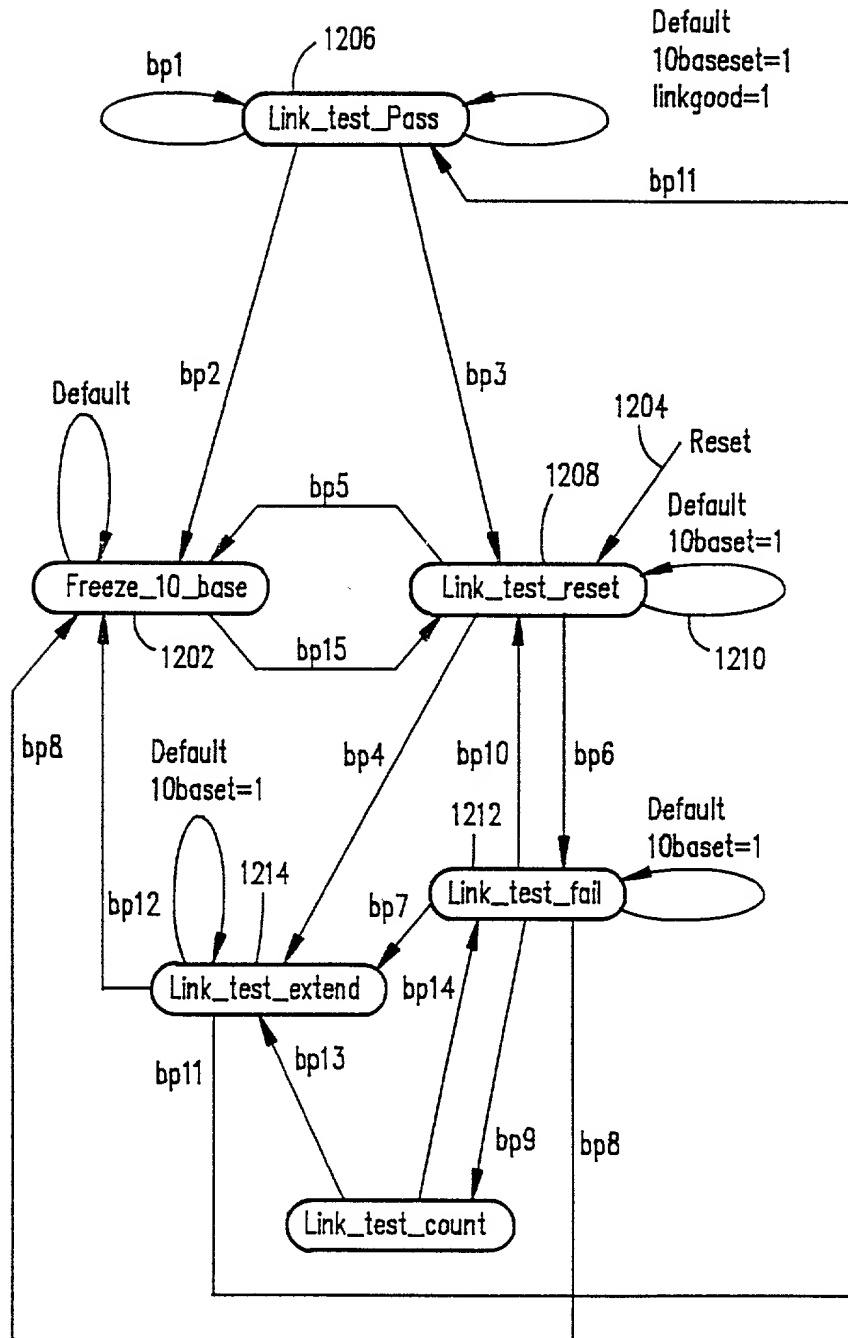


FIG. 12

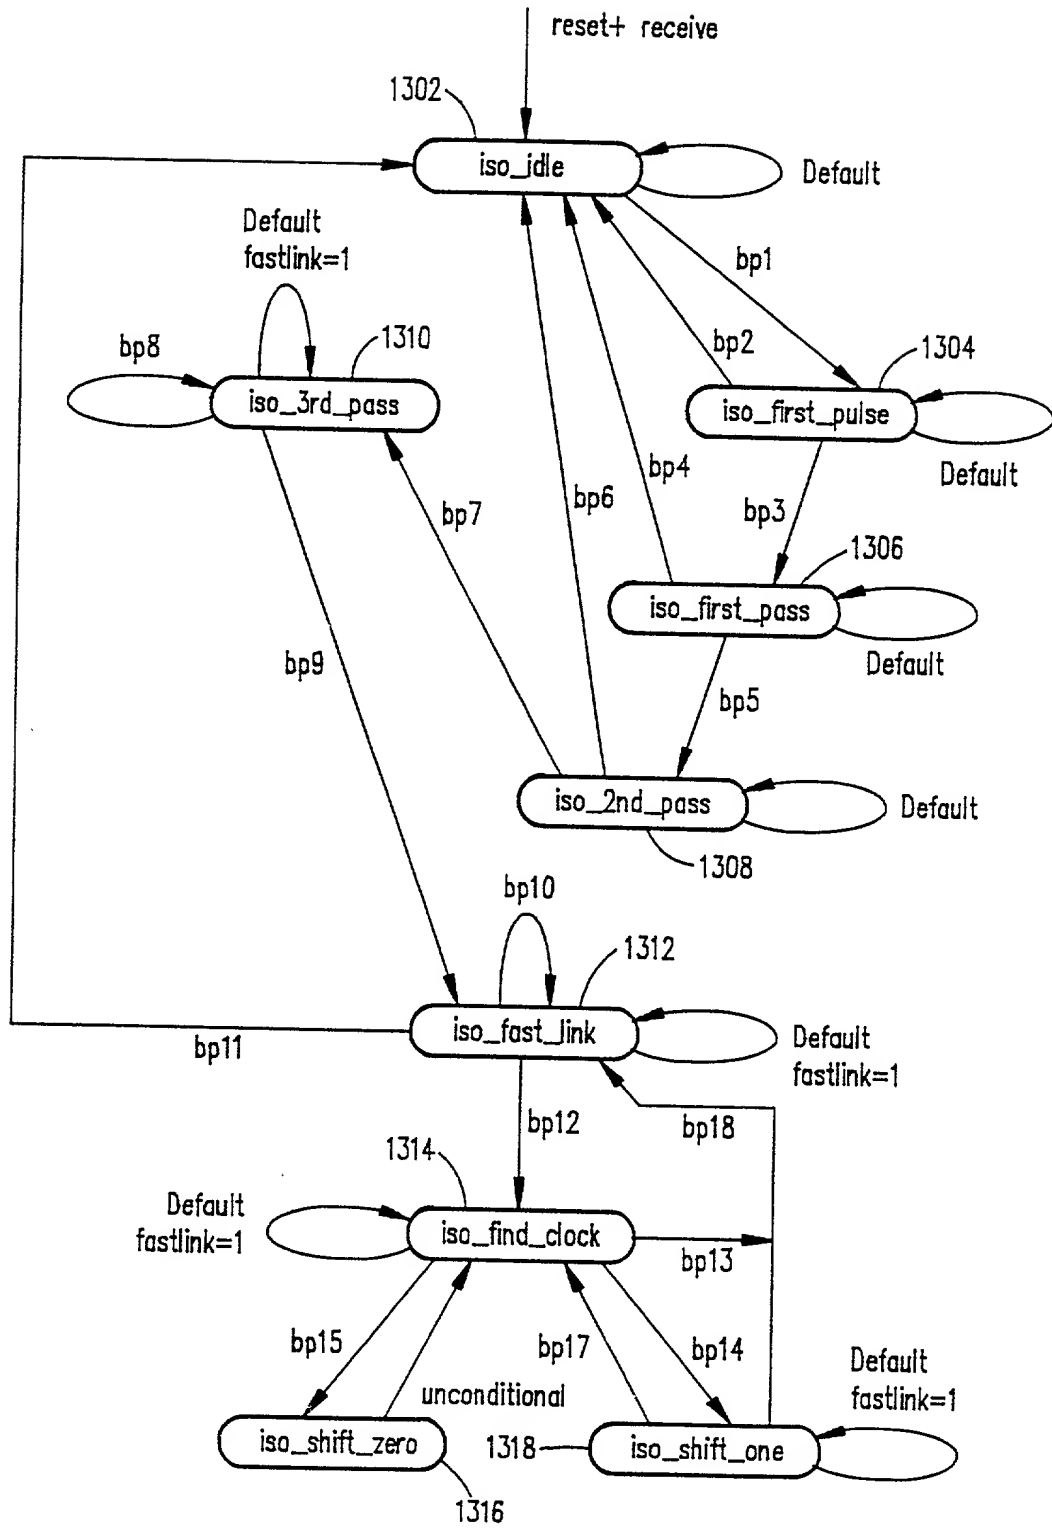


FIG. 13

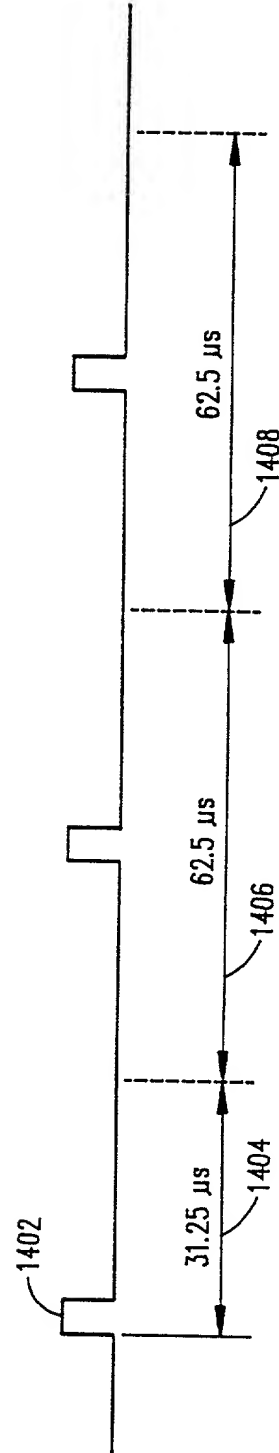


FIG. 14

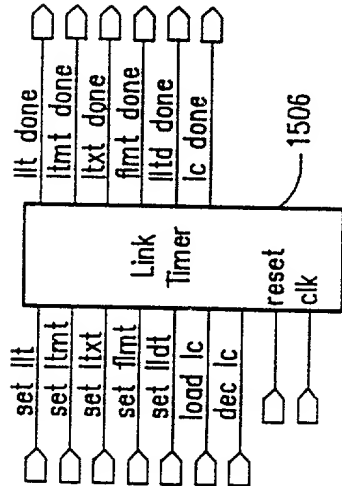


FIG. 15A

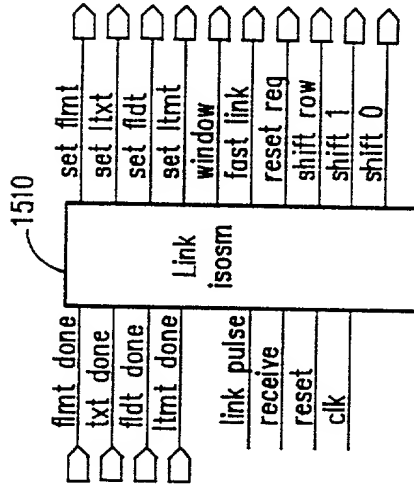


FIG. 15C

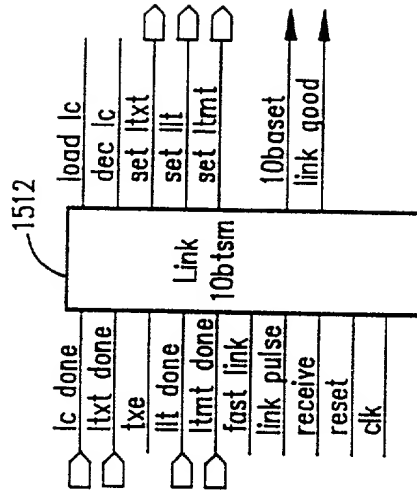


FIG. 15D

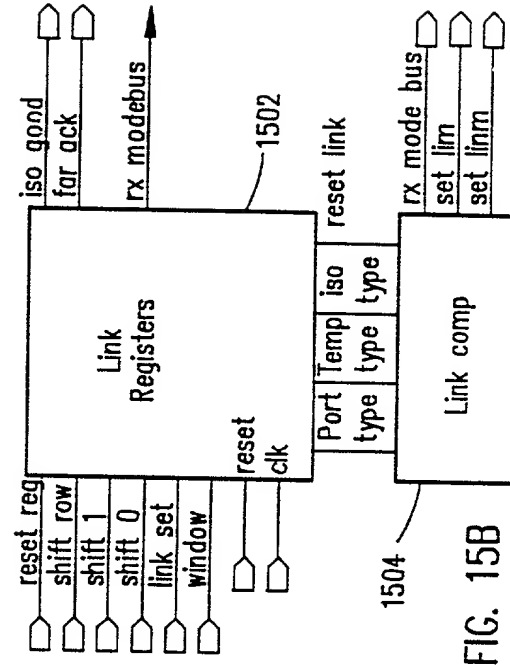


FIG. 15B